

Sabroe® products 2014

Documented performance, tangible benefits
- throughout industrial cooling and heating



Contents

Sabroe® products are recognised and respected throughout the world for their build quality, long-term operating reliability and cost-effectiveness.

You – and your customers – also reap the benefits of our consistent focus on low life cycle costs and world-leading expertise in the use of naturally occurring refrigerants.

Sabroe® products - the big difference	page 4
Sabroe control systems	page 10
Sabroe compressors	page 20
Sabroe chillers	page 38
Sabroe heat pumps	page 50
Sabroe End-of-Line Test Centre	page 56



The Sabroe brand has been in the business of industrial cooling and heating ever since 1897. We've proved we can repeatedly and consistently deliver on our customers' requirements – no matter how big and complex, or how small and straightforward.

We listen to what your real challenges are, and what you really want – and need. And then we focus well over a century of specialist knowledge on how best to achieve it.

Part of Johnson Controls

The Sabroe® product brand is owned by Johnson Controls Denmark ApS.

We are part of the Building Efficiency division of Johnson Controls, enabling us to provide Sabroe customers with a comprehensive range of products, systems and services for meeting heating, ventilating, air conditioning and refrigeration needs in industrial, commercial and residential buildings of all kinds.

Sabroe® products – the big difference

The equipment you need – now and in the future

We provide the equipment you need to put thermal transfers to work in industrial and commercial installations – from a full spectrum of refrigeration compressors of all kinds to industrial chillers and heat pumps.

Sabroe systems are designed to be versatile and future-compatible, making it easy for you to repurpose, retrofit, expand and upgrade your installations and your thermal management capabilities, whenever the need arises.

Documented capabilities and performance

When you sign up for Sabroe solutions and equipment, we make sure you know exactly what you're getting. You don't just get average performance figures – you get exact, documented capabilities for your particular set-up, as tested at the state-of-the-art Sabroe test centre in Denmark, prior to delivery.

Full satisfaction – no surprises

We're committed to full transparency and helping our customers as much as possible. That's why we also use the same data and documentation in all subsequent Sabroe calculations about your set-up.

We document everything – and share the results with you and your staff, so there are no unwelcome surprises and you can put our specialist know-how to best possible use.

Know-how steers you away from risk

Reap the full potential of your equipment purchases

In the world of industrial refrigeration, the equipment you buy – whether standardised or individually customised – is just part of the overall picture.

You only reap the full potential of your equipment purchases when they are effectively integrated into your existing set-up and when all the operating parameters are fine-tuned to ensure you maximum cost-effectiveness.

Prevention is better than cure

With way over a century of heavyweight practical experience in everything even remotely related to industrial refrigeration compressors, Sabroe experts know pretty much all the on-site pitfalls, glitches and bottlenecks likely to occur.

This means that when you specify Sabroe equipment, you get more than you'd normally expect.

Our unique combination of market-leader expertise and first-mover technology capabilities means we know how to help prevent difficulties and downtime, rather than spending time and money dealing with them once they've cropped up.

Intelligent control ups the ante

Cranking up practical value – boosting payback

Top-notch refrigeration set-ups depend heavily on the systems that control how they react to operating conditions and carry out their designated functions.

It's often the control systems that really determine the return on investment and practical, money-earning value.

Electronic advantages

Sabroe brings you the big benefits of world-leader expertise in all the nitty-gritty aspects of industrial refrigeration, seamlessly integrated from the same specialist manufacturer.

Sabroe electronic control and monitoring systems enable you to leverage the usefulness of your compressors, chillers and heat pumps, and to integrate them into industry-standard monitoring and control systems.

Information for better decisions

Data acquisition tells you exactly what's going on in your thermal transfer equipment and your primary processes – and enables you to match the work done to your exact needs at any given time.

Linking everything together

Seamlessly integrated, future-compatible control systems based on open architecture and industry-standard formats are crucial for the energy-efficient use of virtually all thermal transfer systems and equipment.

Better control means better results, and better results mean better return on investment.



Your smartphone enables you to keep tabs on everything going on in your refrigeration plant

Life cycle costs – an equation with many parts

Dealing with the real agendas

Sabroe experts have the practical experience to ask bang-on questions about what your company really needs. This often involves balancing lots of different parameters. That's why we can help you do the sums that give you the most cost-effective solution for your company's specific requirements.

Keeping costs down

The real cost of heating and cooling equipment stretches far beyond the purchase price, accumulating throughout its life cycle.

Everything about Sabroe compressors, chillers and heat pumps focuses on keeping your costs down – from delivery, commissioning and operations to service, retrofit and disposal.

From expenditure to benefits


The energy your system uses is the most important factor – by far – in determining your total cost of ownership. Even minor alterations in energy efficiency can mean a world of cost/benefit difference.

That's why Sabroe focuses on the complete picture – the life cycle costs (LCC) of your whole set-up – instead of just initial purchase costs.


This shifts your thermal transfer systems from being an expense to a benefit – with a visibly positive effect on operating costs, process effectiveness and final results.

Operating costs

- Service costs
- Investment costs
- Energy costs

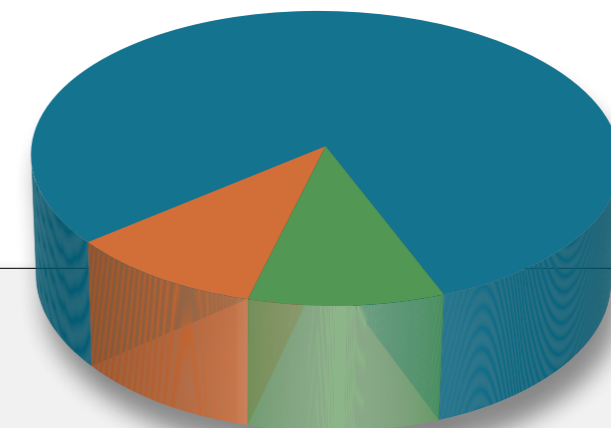

Natural refrigerants make good sense

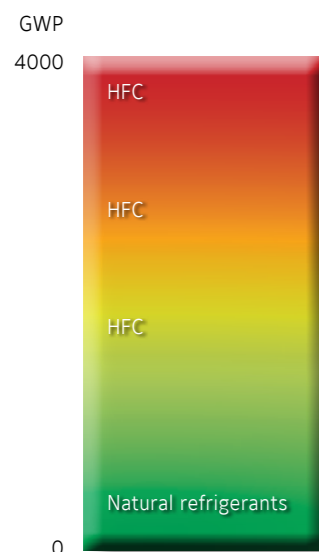

The direct impact of refrigerants on global warming.

The sums add up – and then some

Johnson Controls has profound experience in all kinds of refrigerants for various applications. Sabroe industrial cooling and heating solutions put focus on natural refrigerants, such as ammonia, carbon dioxide, air and water, as well as hydrocarbons.

Balancing pros and cons

But we're not fanatics, and we're careful to listen to your needs and preferences. The pros and cons are rarely straightforward. For example, up to 95% of the carbon footprint of refrigeration installations normally stems from fuel used to run them – not from the refrigerant. This has to be included in any realistic "big picture" calculations.

Thermal qualities count

But the fact is that natural refrigerants often make good financial sense simply because of their thermal efficiency. In some applications, using ammonia as refrigerant, you can save 30% on energy costs – adding up to major savings in through-life operating costs.

Health and safety matter

We are fully aware that naturally occurring refrigerants may pose a risk that needs to be factored into your equations. But Sabroe experts can help you deal with such issues, using relatively straightforward mandatory safety measures, and drawing on oodles of Sabroe practical experience.

Legislation dictates

Technical calculations may lead to one conclusion, while legislations may lead to a very different equipment configuration. Whatever we technicians may prefer, it's pretty clear which way the wind is blowing for the rules we have to abide by. That, too, has to be factored in.

The advantages of using naturally occurring refrigerants

- Very energy-efficient
- No supply scarcity
- Low risk of prohibitive legislation or punitive duties
- Increasingly insisted upon throughout the industrial and consumer supply chain
- Available for virtually all kinds of industrial refrigeration.

Long service life saves you money

Tested to ensure reliability

Sabroe products and systems are renowned for exceptional reliability and technological advantages, backed by our ability to meet even the most demanding customer requirements.

One of the big advantages of doing business with Sabroe is that our compressor, chiller and heat pump products are all systematically tested before delivery. This ensures rapid, glitch-free commissioning and a bare minimum of interruption to your operations.



Industrial Refrigeration Parts Centre – global sourcing

The Industrial Refrigeration Parts Centre provides round-the-clock post-delivery support services that enable operators of Sabroe equipment to maximise return on investment and ensure the long-term stability of their operations.

Making the most of a supremely effective worldwide logistics infrastructure and rapid-response inventory management, the Parts Centre dispatches any part to wherever in the world it may be needed, within just 24 hours (if the part is in stock).

The extensive specialist knowledge available from the Industrial Refrigeration Parts Centre helps you

- identify minor malfunctions before they develop into major problems
- prevent unnecessary and expensive breakdowns
- cut operating costs by ensuring greater efficiency
- update your equipment and streamline your operating procedures
- extend the service life of your Sabroe equipment and installations.

Industrial Compressor Service and Remanufacturing (ICSR)

Our ICSR facility makes it supremely easy for you to source remanufactured compressor blocks to replace worn blocks, or have your own existing compressor blocks overhauled or repaired.

This facility is the overhaul, repair, re-manufacturing and stock centre for Johnson Controls industrial refrigeration companies throughout the world.




Control systems for every requirement

Matching operations to conditions

One of the most effective ways to improve the overall efficiency of your refrigeration setup is to make sure your processes and operations are always in tune with constantly changing operating parameters and equipment status, as well as unpredictable weather and climate conditions.

Sabroe data communication technologies, monitoring systems, control software and sensors combine to help you leverage the effectiveness of all kinds of HVACR systems, as well as the industrial processes and commercial services of which they are a part.

This then enables you to improve the energy efficiency of your operations, reduce your operating costs and boost your return on investment.

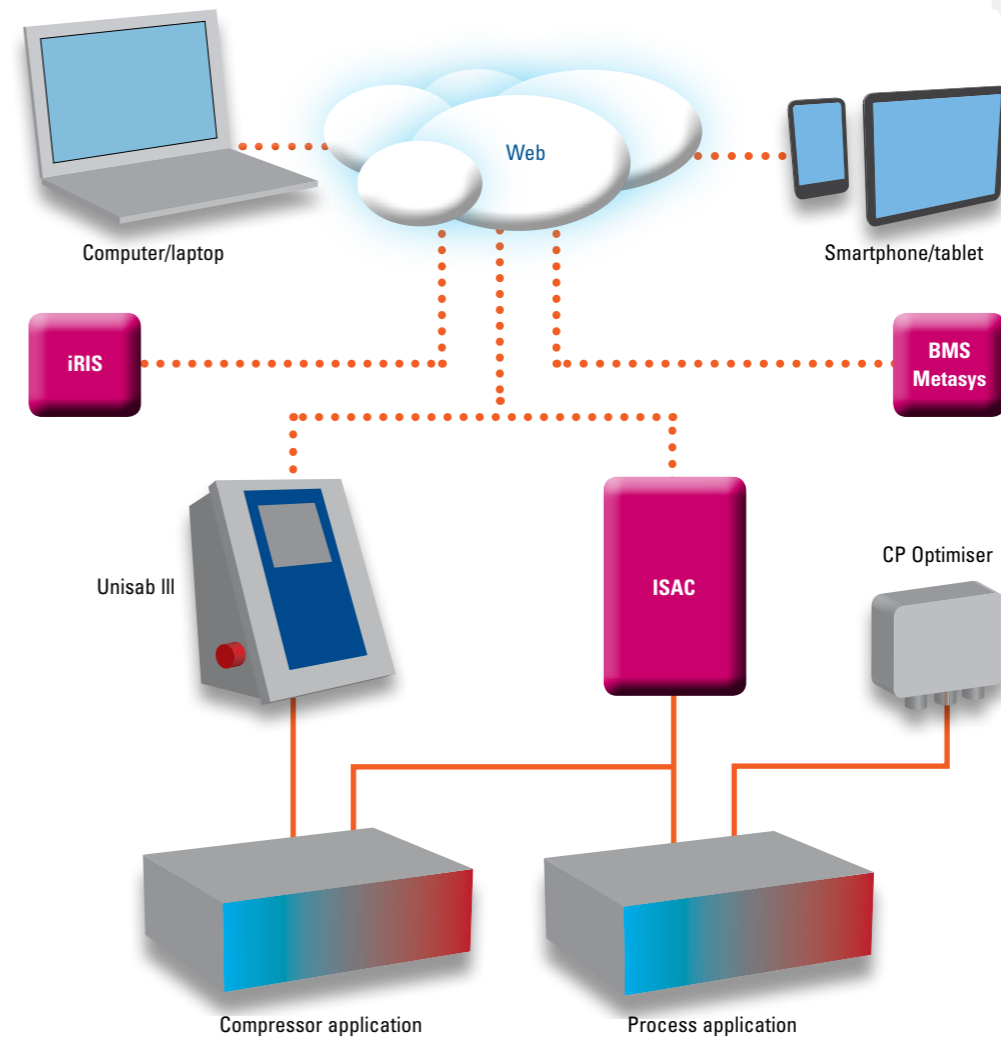


Sabroe Unisab III

Integrated systems controller for refrigeration compressors, chillers and heat pumps

Unisab III systems controllers are connectivity hubs that help make sure refrigeration installations have the best possible performance, maximum uptime and lowest possible operating costs.

These important control units are pre-equipped and pre-configured with the connectivity equipment and protocols necessary for monitoring and controlling a wide range of compressors, compressor packages, chillers and heat pumps – as well as using this data for fault-finding and analysis.

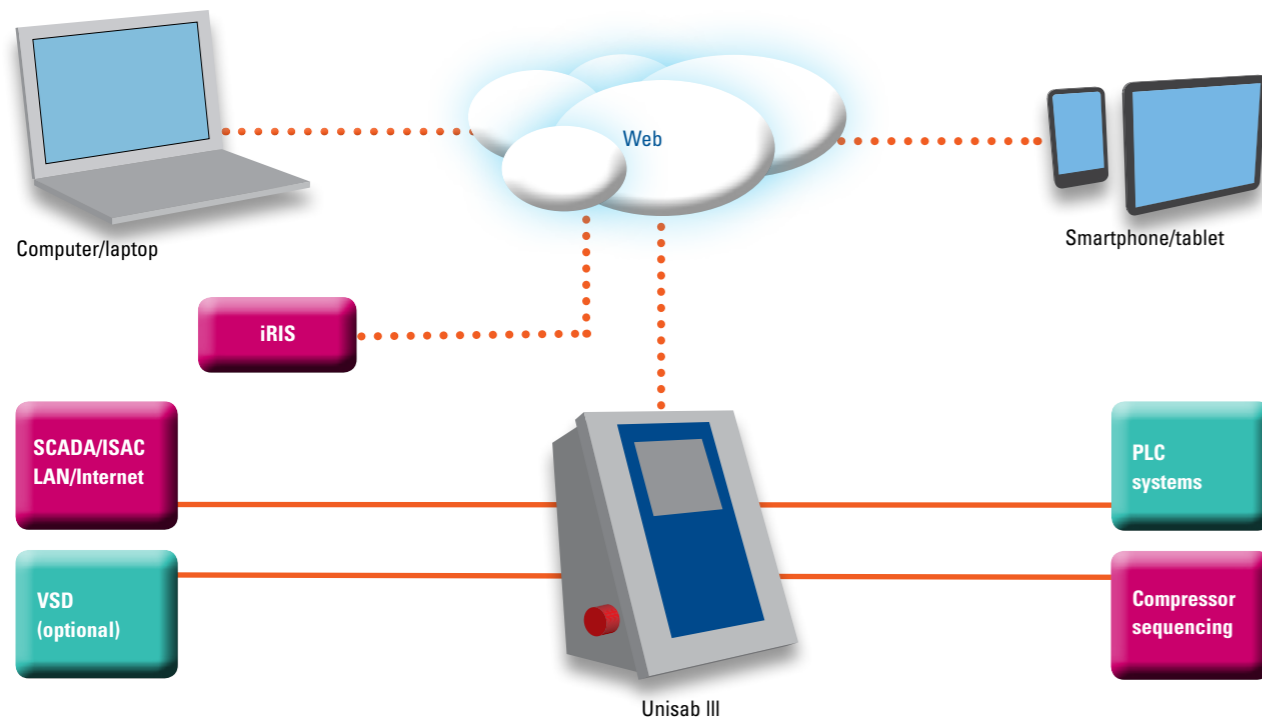

Connectivity

The Unisab III systems controller has normal industry-standard communication ports fitted as standard, and therefore does not require additional communication gateways.

Data can then be made available via any kind of network, where virtually any computer can be used to monitor and operate the Unisab III systems controller.

Functionality

- Service on demand schedule
- Unisab app for smartphone
- Configurable for both screw compressors and reciprocating compressors, with or without variable-speed drive (VSD), and using any refrigerant
- Built-in regulation of suction pressure, water temperature, discharge pressure, etc.
- Limitations on suction pressure, discharge pressure, motor current, etc.
- Logging of operating history and profiles for effective fault-finding and diagnosis
- Email dispatch in case of alarm or shut down.

Retrofit

A wide range of Unisab III retrofit kits are available to provide all the advantages of upgrading a wide range of existing compressors to a modern controls standard for improved performance and control system integration.



Connectivity	Multiple communication ports, including Modbus TCP, Profibus DP and Sequence Bus, as standard
Smartphone app available	iPhone now, Android later
Sequencing	As many as 14 refrigeration compressors, chillers and heat pumps of different makes and types can be linked in sequence, to ensure effective load sharing and capacity optimisation
Diagnostics	Detailed operating data documenting 30 shut-down situations
Refrigerants	Pre-loaded with the requisite data about all refrigerants normally used
Operating languages	Multiple languages available as standard, with additional languages as options
Enclosure	IP54
Ambient temperature	0–55°C
Power supply	85–250 volt AC, 50–60 Hz
Dimensions (H x W x D)	380 x 300 x 210 mm
Weight	6.5 kg

All information is subject to change without notice.

Advantages

Benefits

Single, fully integrated control system for use with virtually all types of compressors and chillers	Ensures more effective monitoring, control and diagnostics of a wide range of key refrigeration installations
Easy to integrate into the vast majority of industrial control systems, providing seamless transfer of data between systems	Ensures effective management of important operating data and secures the production process for best performance
Monitoring, control and diagnostics capabilities combined in one compact, integrated unit	Does away with the need for multiple systems, resulting in significant equipment savings
Compressor sequencing and load sharing are possible without additional equipment	Keeps power consumption to a minimum and reduces operating costs
Intuitive, easy-to-use interface, with a consistent “look and feel”	Requires fewer operator skills, resulting in lower training costs


Sabroe CP Optimiser

Automatic device for balancing R717 condensing pressure against compressor efficiency

Many refrigeration systems that use R717 (ammonia) as refrigerant and feature an evaporative condenser are operated using a fixed set point to maintain a constant condensing pressure. This is rarely ideal, as the energy consumption of the compressors typically increases by 3% for every °C the condensing pressure rises – shaft power consumption is directly influenced by condensing pressure. This impacts overall operating costs and plant efficiency.

Reducing condensing pressure improves compressor efficiency, but itself also requires energy. Maximum overall efficiency stems from the best possible balance between compressor energy consumption and the energy required to reduce condensing pressure.

The CP Optimiser automatically calculates this energy balance, taking into account changing loads and conditions. This paves the way to considerable savings on energy bills, which means the CP Optimiser normally pays for itself within a matter of months.

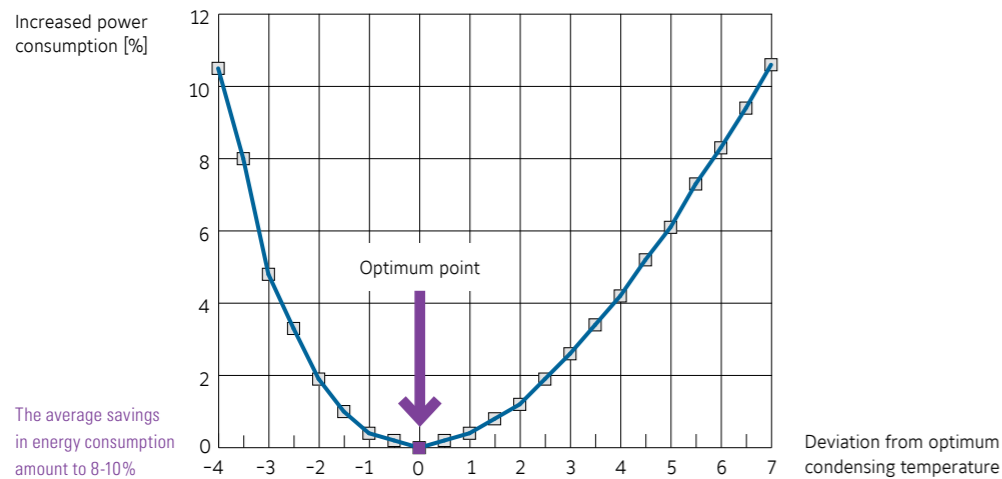

Advantages

Benefits

Automatic operation based on inputs from just two sensors – temperature and humidity	Substantial reduction in compressor energy consumption, resulting in lower operating costs
Output signal can be connected directly to PLCs and frequency converters	Easy to integrate with modern monitoring and control systems to ensure maximum efficiency
No time-consuming programming or complicated technical set-up required	Easy to commission and operate, and helps eliminate human error
No manual intervention or special operator skills required	Virtually no maintenance, calibration or attention necessary after commissioning
No special requirements for integration into new or existing R717-based refrigeration set-ups	Straightforward, inexpensive way to boost operating efficiency and reduce running costs

Where it's used

The CP Optimiser is highly recommended for inclusion in all new installations.

Installing the CP Optimiser in existing installations provides immediate savings on electricity costs.

The CP Optimiser works with the following equipment:

- Evaporative condensers
- Air-cooled condensers
- Open cooling towers.


It can also be configured for use with other types of equipment, by request.

Mounting

The CP Optimiser unit is a small box of electronics that is easy to mount in virtually any convenient location, either indoors or outdoors.

The unit only requires a 24-volt DC power supply and data from appropriate sensors for measuring temperature and relative humidity.

Integration of the CP Optimiser

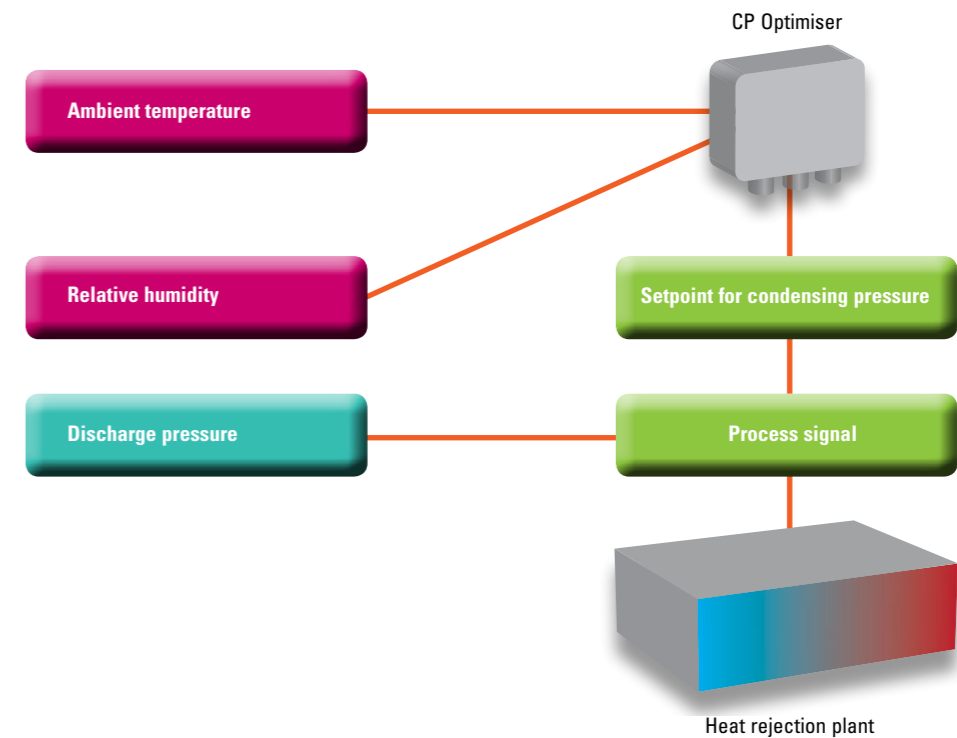

Supply voltage	24-volt DC
Inputs	Temperature 4–20 mA/0–50°C
Relative humidity	4–20 mA/0–100% RH
Outputs	Setpoint signals normally 4–20 mA or 0–10 volt DC
Dimensions (H x W x D)	115 x 90 x 55 mm
Enclosure	IP54
Cable connections	4 x PG7

Temperature and relative humidity sensors are not included with the Sabroe CP Optimiser, but are available as optional equipment. Controller (PLC) not included.


All information is subject to change without notice.

Sabroe Integrated Standard Automation Concept (ISAC)

Monitoring and control interface configuration system for industrial refrigeration installations

ISAC is a unique Sabroe software tool for designing and configuring refrigeration control and monitoring set-ups of virtually all kinds. It provides an effective way to integrate SCADA graphics with PLC functionality in order to ensure effective, reliable monitoring and control of both large and small industrial refrigeration installations.

ISAC modules provide standardised, pre-vetted solutions for almost any installation, based on consistent, industry-standard data inputs and outputs that ensure seamless, glitch-free exchanges of data between many different kinds of equipment, regardless of capacity, configuration or manufacturer.

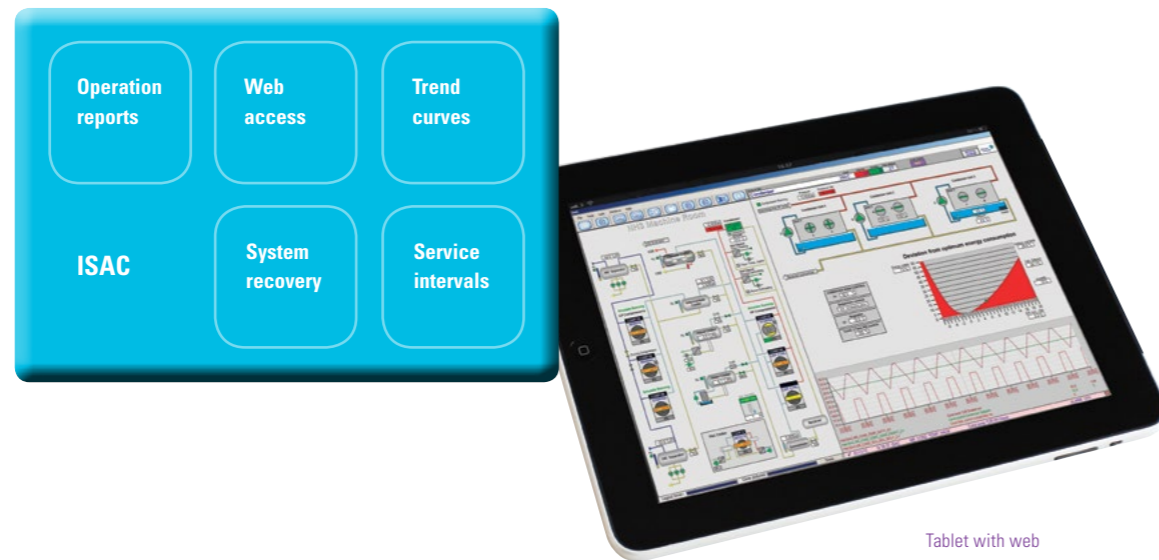

Advantages	Benefits
Extensive Sabroe practical experience is embedded in all ISAC modules	Ensures rapid, cost-effective application of best practise
All modules are designed as modular building blocks and based on standardised interfaces and data exchange configurations	Minimises time required for design, planning, configuration and service
Each module designed and tested individually to eliminate technical incompatibilities	Greater safety, greater reliability and lower operating costs
Supports a wide range of standard configurations, ranging from single touch screens to multiple workstations	Easy to scale to the exact functionality required
Based on standardised components with a very high degree of documentation, for maximum consistency and efficiency	High saving potential on commissioning, running in and system optimisation, as well as on energy consumption

Compatibility/integration

The Sabroe ISAC system is easily scalable to meet a broad spectrum of possible refrigeration plant configurations, and to give the best match with the performance and technical requirements of each individual installation.


At the same time, any subsequent plant modifications or extensions will build on and integrate into the original ISAC monitoring and controls configuration package.

ISAC provides some of the following standard components:

- Multiple compressor interfaces
- Flexible cold stores main options
- Defrost queue management
- Conditional setpoints and neutral zones
- Smart compressor sequencing control.

The ISAC system is fully integrated with the iRIS remote monitoring system. The software structure is compatible with the exchange of data between these two systems without any time-consuming software updates.

ISAC is based on – and completely compatible with – industry-standard Siemens S7 hardware and GE IFIX Proficy SCADA software.

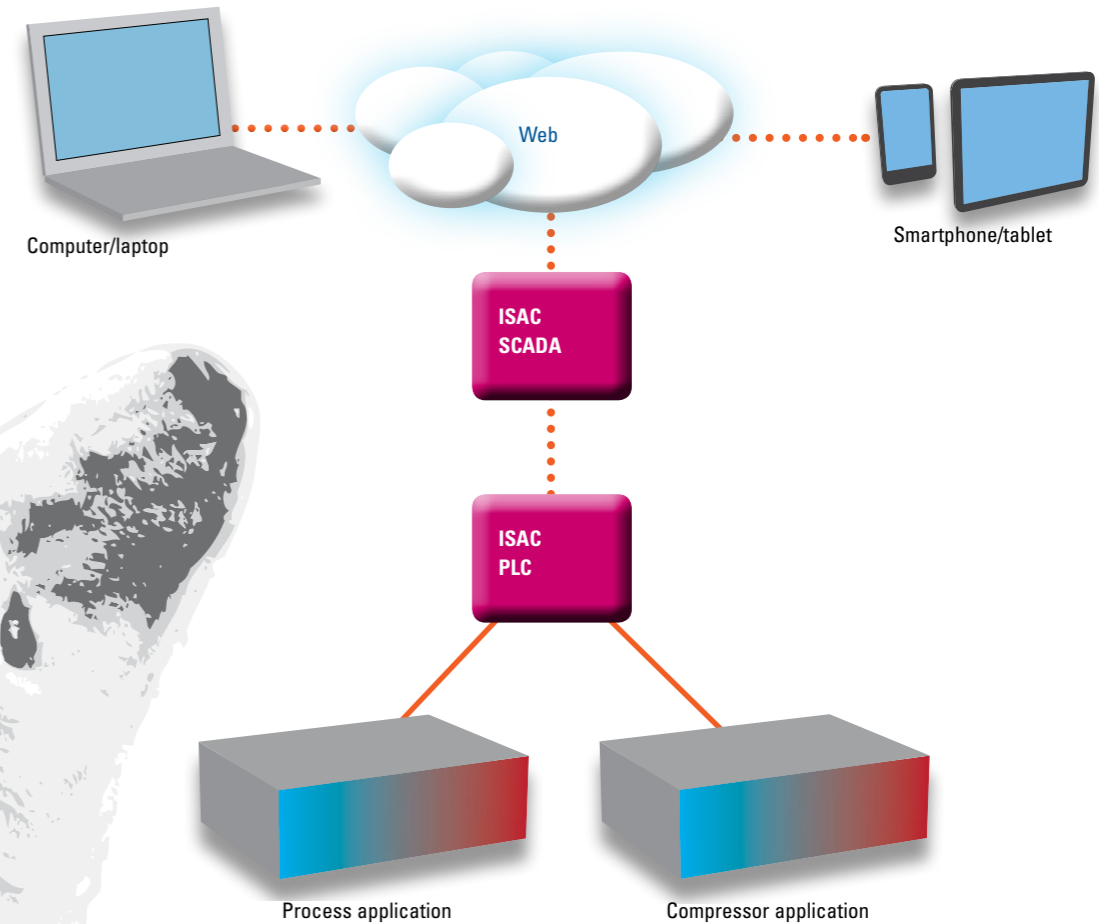

All information is subject to change without notice.

Sabroe Intelligent Remote Information Services (iRIS)

Intelligent reporting and documentation system for optimising plant performance

Intelligent Remote Information Services (iRIS) is a unique Sabroe software platform (managed by Johnson Controls) that registers, captures and collates performance data from all types of industrial refrigeration and thermal transfer equipment.

The iRIS system processes data such as:

- Load distribution and power consumption
- Performance patterns and fluctuations over time
- Statistics for shutdowns and alarms to reveal any irregularities in operation
- Comparisons and benchmarking between the different plants in a company, and operations in different countries.

The iRIS system is part of a complete service concept, working on the basis of information collected and structured by the iRIS server to form different reports and services. These are available by subscription, tailored to the requirements of each individual installation.



Advantages

Benefits

Reliable, comprehensive operating data documenting what is actually happening in the refrigeration installation

Best possible basis for streamlining and optimising operations based on documented facts

Performance and energy consumption benchmarks on a comparative basis

Greater capacity, reduced energy consumption and better plant performance

More cost-effective operations and solid facts for maintenance and extension

Solid operating data as the basis for decisions about new investment and new equipment configurations

Identifying potential problems and inefficiencies before they give rise to disruption

Predictive maintenance and lower service costs

Analysis and guidance by refrigeration technology experts

Access to world-class technical assistance and optimisation knowledge

Compatibility/integration


The iRIS software platform can be adapted to a wide range of refrigeration systems, right from individual compressors to complete refrigeration plants, and is equally well suited for new installations and existing plants.

iRIS is designed to interface seamlessly with Unisab III compressor controllers and plant control systems designed using ISAC toolbox modules. It is also possible to integrate with other systems where data are made available.

Advantages of comparative analysis

The ground-breaking iRIS platform enables owners and operators of refrigeration systems to benefit from solid comparative data, built up over an extended period. This valuable data is automatically stored, structured and presented so that it can be interpreted and applied by Johnson Controls refrigeration technology experts, to tweak and streamline the plant's operating profile.

Customers benefit from direct access to all the expertise and experience available from one of the world's biggest companies in this field – and on the basis of documented performance data.

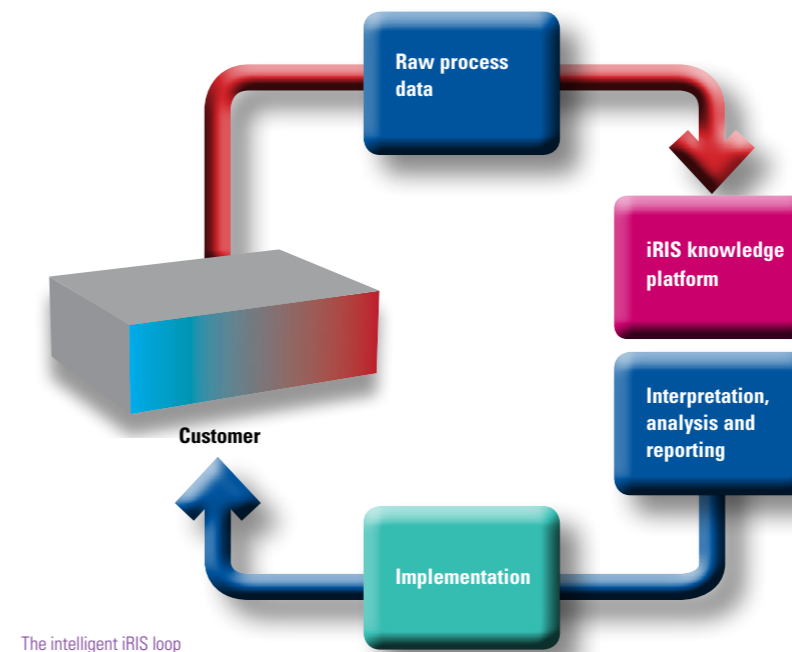

The intelligent iRIS loop

All information is subject to change without notice.



Screw or reciprocating compressor?

There is no simple answer to this constantly recurring question. Neither is best. Both technologies are viable alternatives for use in almost all installations, and both types are normally capable of doing the job.

Our sole aim is to make sure you get the best out of your particular set-up, and the best profit margins from your operations.

And to do that we can supply state-of-the-art compressors of both types, covering the full scope of normal capacities.

The criteria you have to balance normally include:

- Required capacity
- Operating conditions
- Available space
- Part-load requirements
- Temperature levels
- Energy consumption
- Choice of refrigerant
- Environmental concerns
- Maintenance issues

Variable-speed drive - only using what's needed


The vast majority of Sabroe compressor models (both reciprocating and screw types) are available with variable-speed drive (VSD) to provide stepless control of your compressor capacity.

This helps you achieve maximum cooling effect using the minimum of energy, as well as keeping operating costs to the absolute minimum. The combination of a frequency converter, a VSD motor and the Unisab III integrated systems controller makes it possible to run the drive motor at speeds that match the load at any given time.

This enables you to reduce energy costs by as much as 30% compared with traditional fixed-speed compressors.



Sabroe compressor programme

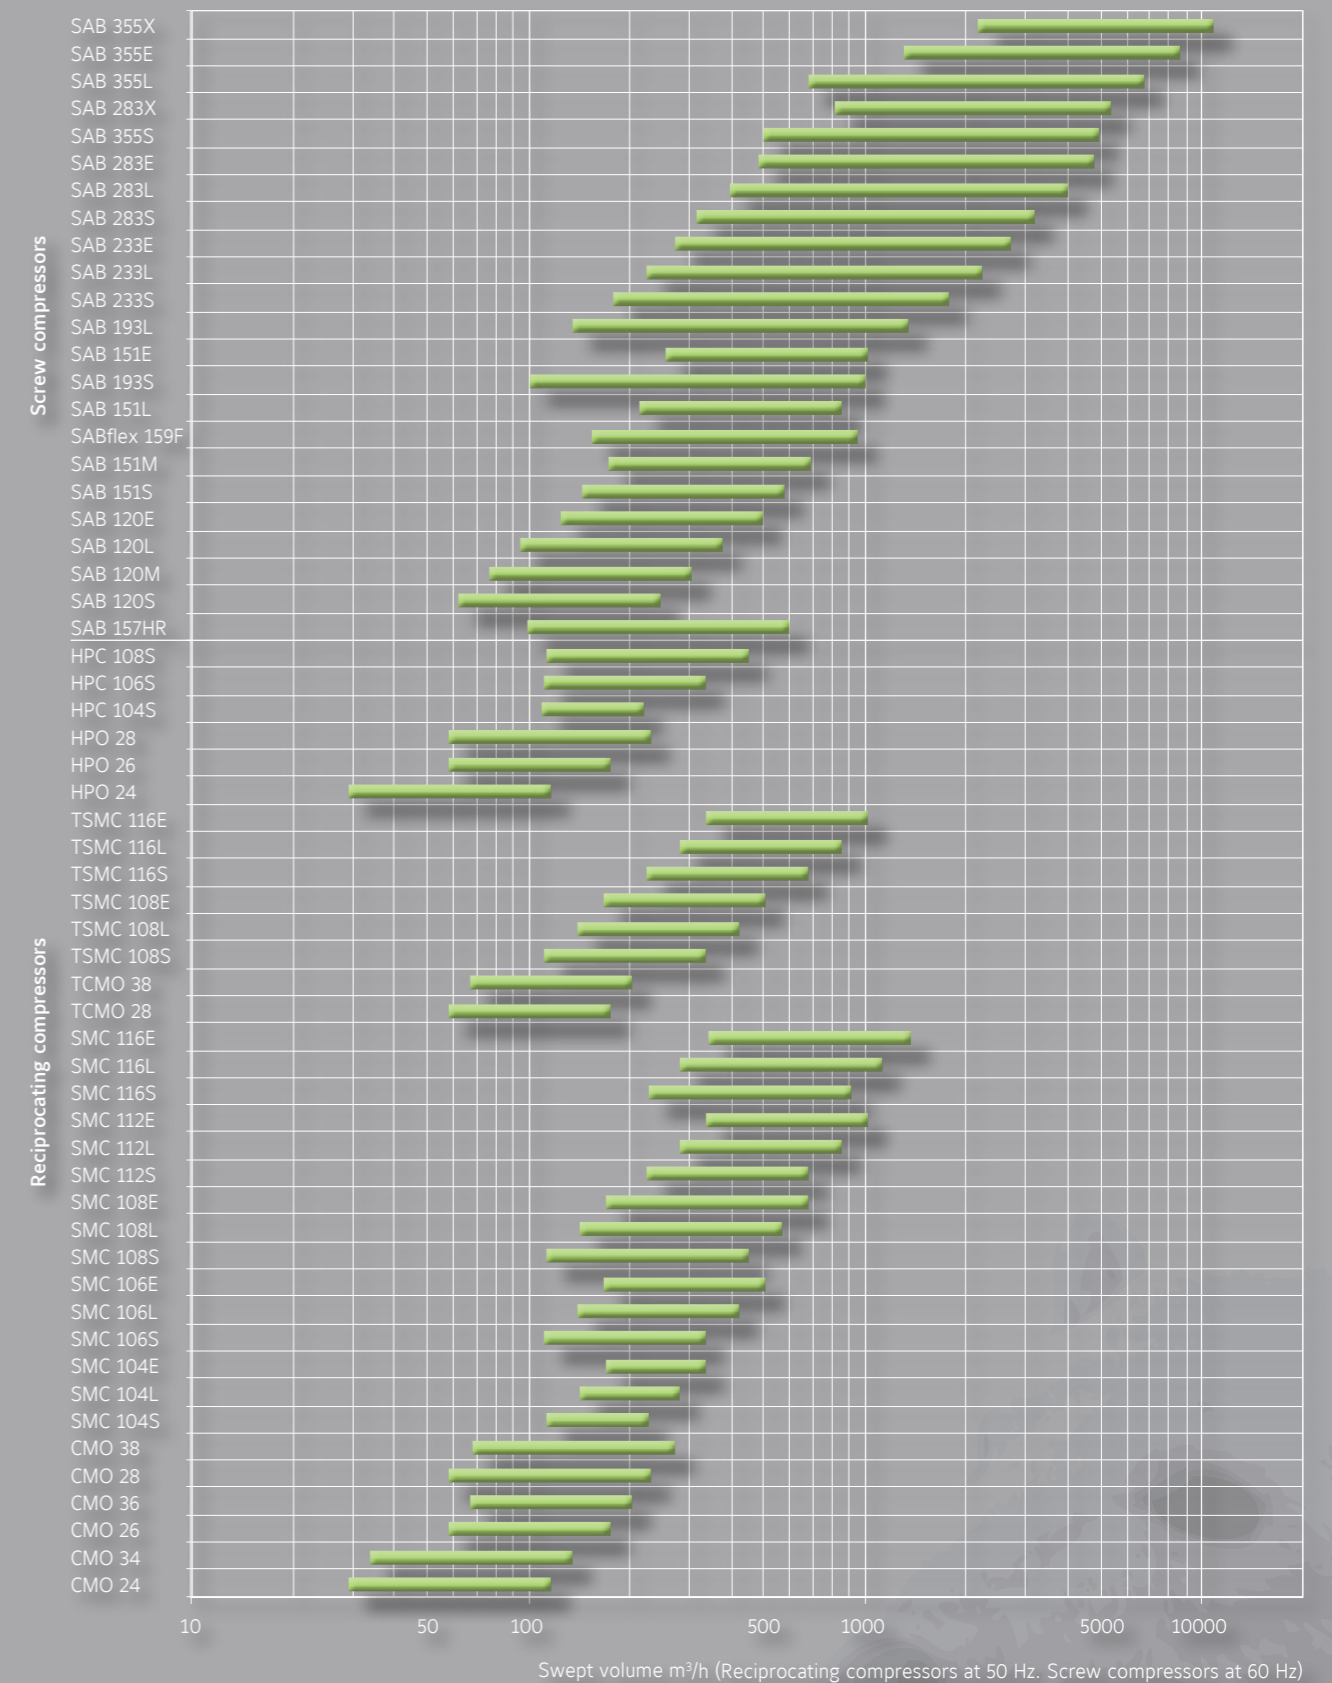

Sabroe CMO reciprocating compressor units

Small single-stage compressors with swept volumes of 100–270 m³/h

CMO compressor units are small units specially designed for use in smaller-scale refrigeration installations where reliability is a particular concern, and uninterrupted service a big priority.

They are an economical, low-maintenance solution for smaller-scale, heavy-duty refrigeration installations, and are most commonly used as stand-alone units operating at full load, or as small back-up compressors.

Range


Six different models are available to provide swept volumes of between 97 and 273 m³/h.



CMO 24 reciprocating compressor unit with Unisab III systems controller

Options

- Unisab III systems controller
- Variable-speed drive line (Unisab always included)
- Gauges, thermometers and temperature/pressure control switches
- Extended cylinder capacity control
- Oil level regulator (for use in parallel systems)
- ATEX-compliant configuration
- Oil separators with coalescing element
- Special vibration dampening.

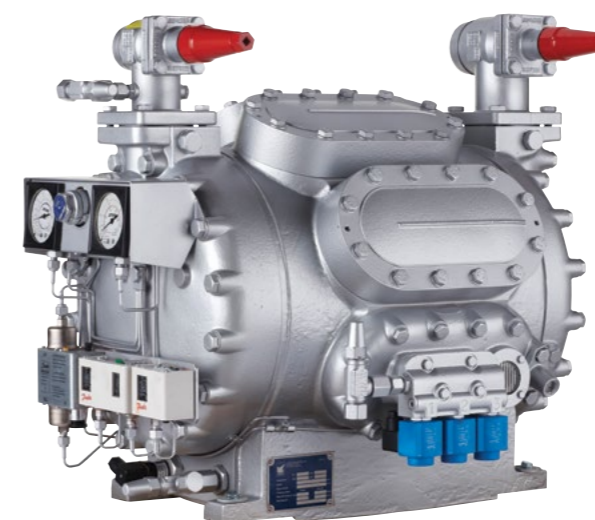

CMO 28 reciprocating compressor block with gauges

Model	Number of cylinders	Swept volume at 1500 rpm m ³ /h	Swept volume at 1800 rpm m ³ /h	Nominal capacities in kW at 1500 rpm					Dimensions in mm Direct coupled unit			Weight excluding motor kg	Sound pressure level at 1500 rpm dB(A)
				R717		Booster	R404A		L	W	H		
				Single/high stage -10/+35°C	0/+35°C		Single/high stage 0/+35°C	-10/+35°C					
CMO 24	4	97	116	53	85	14	85	54	1400-2150	800	900	480	69
CMO 26	6	146	175	79	127	21	127	81	1450-2175	800	900	520	71
CMO 28	8	194	233	105	170	28	169	108	1475-2200	800	900	550	72
CMO 34	4	113	136	62	100	17	99	63	1400-2150	800	900	480	70
CMO 36	6	170	204	93	149	25	149	95	1450-2175	800	900	520	72
CMO 38	8	228	273	123	199	33	198	127	1475-2200	800	900	550	73

Nominal capacities are based on 1500 rpm and 5°C liquid subcooling.

All refrigerants make it possible to operate CMO compressors at speeds of up to 1800 rpm.

1500 rpm at 50 Hz.

1800 rpm at 60 Hz or VSD.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.

Advantages

High coefficient of performance (COP), with excellent performance even under part-load conditions

Special design ensures low noise and vibration

Variable-speed drive (optional) provides stepless capacity control over the entire operating range

Repairs can be undertaken *in situ*, without removing the compressor

Easy to access for service, with limited spare parts requirements

Benefits

Low power consumption, which greatly reduces operating costs

Wider range of possible mounting locations, and minimal expenditure on noise attenuation systems

Power consumption and operating costs kept to a minimum

Lower repair costs and less downtime

Easy, inexpensive maintenance, which helps limit downtime and reduce operating costs

Sabroe SMC reciprocating compressor units


Large single-stage compressors with swept volumes of 200–1350 m³/h

SMC compressor units are ideal for use in medium-sized refrigeration installations where reliable service is a major priority. They are particularly effective under part-load conditions.

Sabroe SMC compressors are world-renowned for their exceptional reliability, making them an economical, low-maintenance solution for heavy-duty refrigeration, using all common refrigerants.

Range

Fifteen different models are available to provide swept volumes of between 226 and 1357 m³/h.

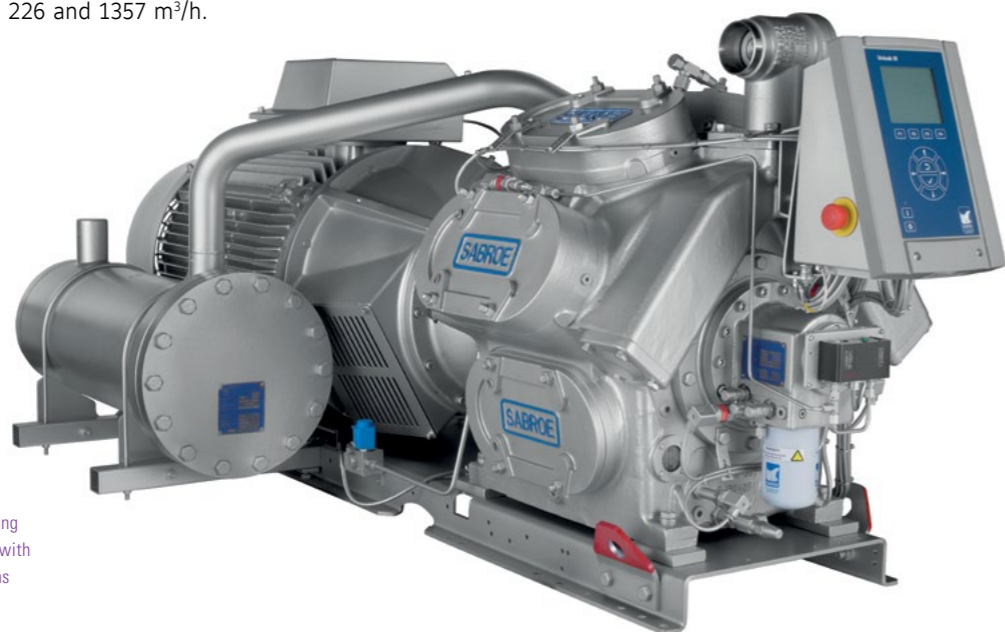

SMC 108 single-stage reciprocating compressor unit with Unisab III systems controller

Advantages

Benefits

High coefficient of performance (COP), with excellent performance under part-load conditions

Low power consumption, which greatly reduces operating costs

Variable-speed drive (optional) provides stepless capacity control over the entire operating range

Power consumption and operating costs kept to a minimum

Repairs can be undertaken *in situ*, without removing the compressor

Lower repair costs and less downtime

Easy to access for service, with limited spare parts requirements

Easy, inexpensive maintenance, which helps limit downtime and reduce operating costs

Special oil separator design based on coalescer technology

Low oil carry-over, which cuts back on oil costs



Options

- Unisab III systems controller
- Variable-speed drive line (Unisab always included)
- Gauges, thermometers and temperature/pressure control switches
- Extended cylinder capacity control
- Oil level regulator (for use in parallel systems)
- ATEX-compliant configuration
- Special vibration dampening.



SMC 108 single-stage reciprocating compressor block with gauges

Model	Number of cylinders	Swept volume at 1500 rpm m ³ /h	Swept volume at 1800 rpm m ³ /h	Nominal capacities in kW at 1500 rpm					Dimensions in mm Direct coupled unit			Weight excluding motor kg	Sound pressure level at 1500 rpm dB(A)
				R717		Booster	R404A		L	W	H		
				Single/high stage -10/+35°C	0/+35°C		Single/high stage 0/+35°C	-10/+35°C					
SMC 104 S	4	226	271	129	209	35	205	132	2400-2800	1228	1103	830	80
SMC 104 L	4	283	339	167	266	46	208	235	2400-2800	1228	1103	830	81
SMC 104 E	4	339	N/A	206	324	57	N/A	N/A	2400-2800	1228	1103	830	81
SMC 106 S	6	339	407	194	313	52	308	197	2400-2800	1190	1108	925	81
SMC 106 L	6	424	509	251	398	70	312	202	2400-2800	1190	1108	925	82
SMC 106 E	6	509	N/A	309	486	86	N/A	N/A	2400-2800	1190	1108	925	82
SMC 108 S	8	453	543	259	417	70	410	263	2400-2800	1201	1103	990	82
SMC 108 L	8	566	679	335	531	93	416	270	2400-2800	1201	1103	990	83
SMC 108 E	8	679	N/A	412	648	115	N/A	N/A	2400-2800	1201	1103	990	83
SMC 112 S	12	679	814	388	626	106	616	395	2425-3000	1290	1314	1660	83
SMC 112 L	12	848	1018	502	796	140	624	405	2425-3000	1290	1314	1660	83
SMC 112 E	12	1018	N/A	618	972	172	N/A	N/A	2425-3000	1290	1314	1660	83
SMC 116 S	16	905	1086	517	834	141	821	526	2475-3200	1301	1314	1760	84
SMC 116 L	16	1131	1357	669	1062	187	831	539	2475-3200	1301	1314	1760	84
SMC 116 E	16	1357	N/A	824	1297	230	N/A	N/A	2475-3200	1301	1314	1760	84

Nominal capacities are based on 1500 rpm and 5°C liquid subcooling, 1500 rpm at 50 Hz, 1800 rpm at 60 Hz or VSD. Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

Min./max. speed	R717	R404A
SMC S-series	500-1800 rpm	500-1800 rpm
SMC L-series	500-1800 rpm	500-1500 rpm
SMC E-series	500-1500 rpm	N/A

All information is subject to change without notice.

Sabroe HPO/HPC high-pressure reciprocating compressor units


High-pressure versions of CMO and SMC reciprocating compressors, with swept volumes of 100–450 m³/h

The blocks of the compressor units in the HPO/HPC range are cast in high-strength ductile iron, making them particularly strong and capable of operating under exceptionally high pressures – up to 40 bar for HPC units and 50 bar for HPO units.

This results in condensing temperatures of up to 70°C, and makes HPO/HPC compressors ideal for use in conjunction with heat pumps and hot water applications, and as an extra “supercharge” stage in traditional ammonia plants.

Range

Six different models are available to provide swept volumes of between 97 and 452 m³/h.

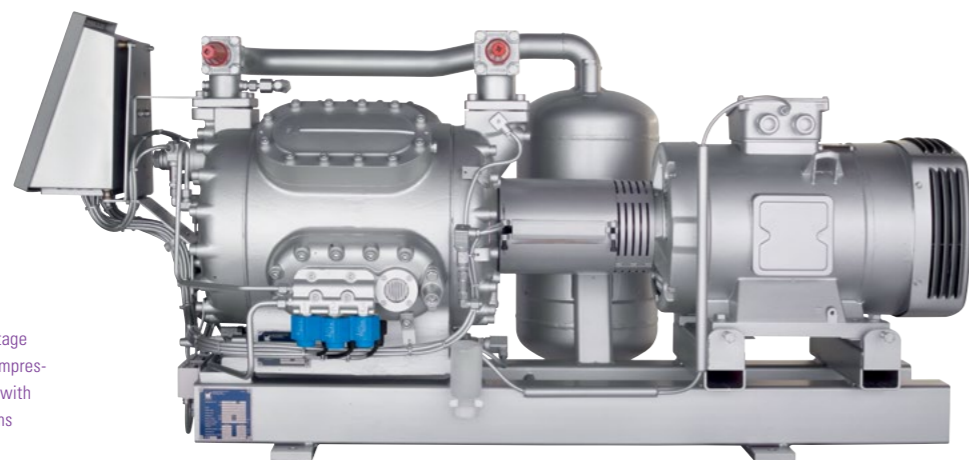

HPO 24 single-stage reciprocating compressor unit (50 bar) with Unisab III systems controller

Advantages

Benefits

High coefficient of performance (COP), with excellent performance under part-load conditions

Low power consumption, especially under part-load conditions. This greatly reduces operating costs

Variable-speed drive (optional) provides stepless capacity control over the entire operating range

Power consumption and operating costs kept to a minimum

Provides exceptionally high condensing temperatures – up to 70°C

Matches radiator temperature in most domestic/commercial heating systems, making HPO/HPC units ideal in district heating, etc

Designed for easy service access, and repairs can be undertaken *in situ*, without removing the compressor


Lower repair and maintenance costs, and less downtime

Special oil separator design based on coalescer technology

Low oil carry-over, which cuts back on oil costs

Options

- Variable-speed drive line
- Gauges, thermometers and temperature/pressure control switches
- Extended cylinder capacity control
- ATEX-compliant configuration
- Special vibration dampening.

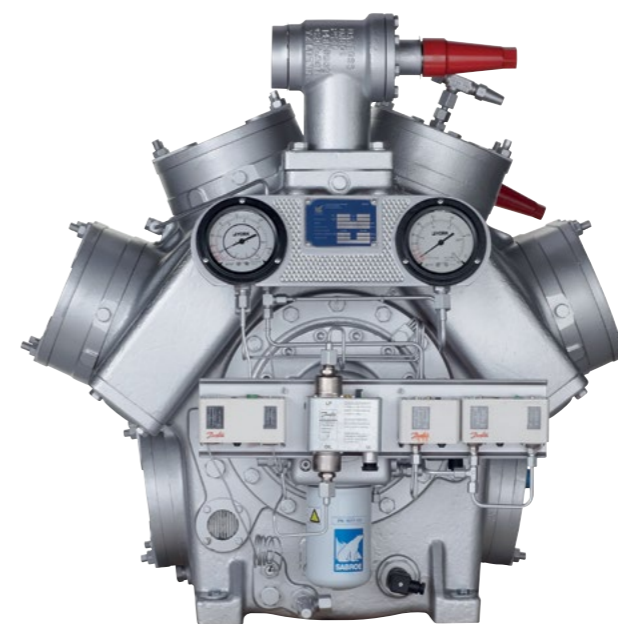

HPC 108 single-stage reciprocating compressor block (40 bar) with gauges

Model	Number of cylinders	Swept volume at 1500 rpm m ³ /h	Swept volume at 1800 rpm m ³ /h	Nominal capacities in kW at 1500 rpm					Dimensions in mm Direct coupled unit			Weight excluding motor kg	Sound pressure level at 1500 rpm dB(A)
				Heating R717 +35/+72°C	Cooling R717 0/+55°C	Cooling R410A 0/+35°C	Cooling R744 -50/-10°C	Cooling R744 -40/-5°C	L	W	H		
				HPO 24	4	97	116	267	71	117	92		
HPO 26	6	146	175	397	106	176	138	207	1600-1950	940	985	550	76
HPO 28	8	194	233	529	141	235	184	276	1620-1970	940	985	580	77
HPC 104 S	4	226	N/A	629	168	284	228	338	2400-2800	1228	1103	850	81
HPC 106 S	6	339	N/A	942	252	426	343	507	2400-2800	1190	1108	1025	82
HPC 108 S	8	452	N/A	1256	335	568	457	676	2400-2800	1201	1103	1100	83

Nominal capacities are based on 1500 rpm.

Nominal capacities for R744 are based on no subcooling in cascade cooler, 10°K useful suction superheat.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.

Sabroe TCMO/TSMC two-stage reciprocating compressor units

Two-stage versions of CMO and SMC reciprocating compressors, with swept volumes of 150–1000 m³/h

Sabroe TCMO/TSMC two-stage reciprocating compressors are an economical operating alternative to single-stage compressors in smaller low-temperature refrigeration installations.

TCMO/TSMC compressor units are also ideal for medium-size industrial refrigeration installations that involve a big temperature range, such as freezer installations. Furthermore, these units are easy to customise with intermediate cooling systems.

Using a two-stage set-up built together as a single unit helps avoid equipment duplication – and thus reduce costs and save space.

Range

Eight different models are available to provide swept volumes of between 146 and 1018 m³/h.



TSMC 108 two-stage reciprocating compressor unit with intermediate cooling system and Unisab III systems controller

Advantages	Benefits
Splitting the temperature lift into two separate stages reduces overall energy consumption	Two-stage installations are relatively cost-effective, which helps reduce energy costs
Relatively small footprint	Can be installed in relatively small locations, or where space is limited
High coefficient of performance (COP), with excellent performance under part-load conditions	Low power consumption, which greatly reduces operating costs
Variable-speed drive (optional) provides stepless capacity control over the entire operating range	Power consumption and operating costs kept to a minimum

Options

- Unisab III systems controller
- Gauges, thermometers and temperature/pressure control switches
- Extended cylinder capacity control
- Oil level regulator (for use in parallel systems)
- ATEX-compliant configuration
- Special vibration dampening.

Intermediate cooling systems (optional)

In plants with multiple two-stage compressors, TCMO/TSMC units can be connected to a shared intermediate cooler, in a separate installation.

Alternatively, a range of built-on intermediate cooling systems are available, as optional equipment.

- Injection inter-stage gas cooling without liquid sub-cooling
- Injection inter-stage gas cooling with liquid sub-cooling in a shell-and-tube heat exchanger
- Closed flash inter-stage cooling in a shell-and-coil intermediate cooler, with liquid sub-cooling in the coil.

Model	Number of cylinders low/high-pressure side	Swept volume at 1500 rpm m ³ /h	Swept volume at 1800 rpm m ³ /h	Nominal capacities in kW at 1500 rpm *) 1200 rpm				Dimensions in mm Direct-coupled unit without intermediate cooler			Weight excluding motor kg	Sound pressure level at 1500 rpm dB(A)
				-40/+35°C				L	W	H		
				R717	R134a	R404A	R507					
TCMO 28	6 / 2	146	175	20	11	27	28	1400-1750	700	1000	500	71
TCMO 38	6 / 2	170	204	23	14	32	33	1400-1750	700	1000	500	71
TSMC 108 S	6 / 2	340	407	50	30	66	70	1900-2500	1050	1125	1000	82
TSMC 108 L	6 / 2	424	509	66	31 *)	68 *)	72 *)	1900-2500	1050	1125	1000	83
TSMC 108 E	6 / 2	611	N/A	82	N/A	N/A	N/A	1900-2500	1050	1125	1000	83
TSMC 116 S	12 / 4	679	814	100	60	132	139	2475-3200	1150	1335	1800	84
TSMC 116 L	12 / 4	848	1018	133	62 *)	136 *)	144 *)	2475-3200	1150	1335	1800	84
TSMC 116 E	12 / 4	1018	N/A	163	N/A	N/A	N/A	2475-3200	1150	1335	1800	84

Nominal capacities are at 1500 rpm except for *) at 1200 rpm. Nominal capacities are based on 2°C subcooling from condenser, 2°C superheat and liquid subcooling in intermediate cooler to 10°C above intermediate temperature. 1500 rpm at 50 Hz. 1800 rpm at 60 Hz or VSD. Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.



Sabroe SABflex™ screw compressor units

Small screw compressor units with swept volumes of 160–950 m³/h


Sabroe SABflex screw compressors are specially designed for installations where the requirements for refrigeration capacity vary over time. These smaller-size units are optimised to ensure exceptional part-load performance as well as the best possible energy efficiency.

Everything about these units is configured for use with variable-speed drive (VSD), doing away with the traditional capacity slider and ensuring skip-free performance across the entire 1,000–6,000 rpm capacity range.

The VSD drive can be mounted on the unit, or separately in an appropriate switchboard room.

Range

SABflex units are available to provide swept volumes of 160–950 m³/h at 6000 rpm using a high-speed motor, or 160–570 m³/h at 3600 rpm using a standard motor.

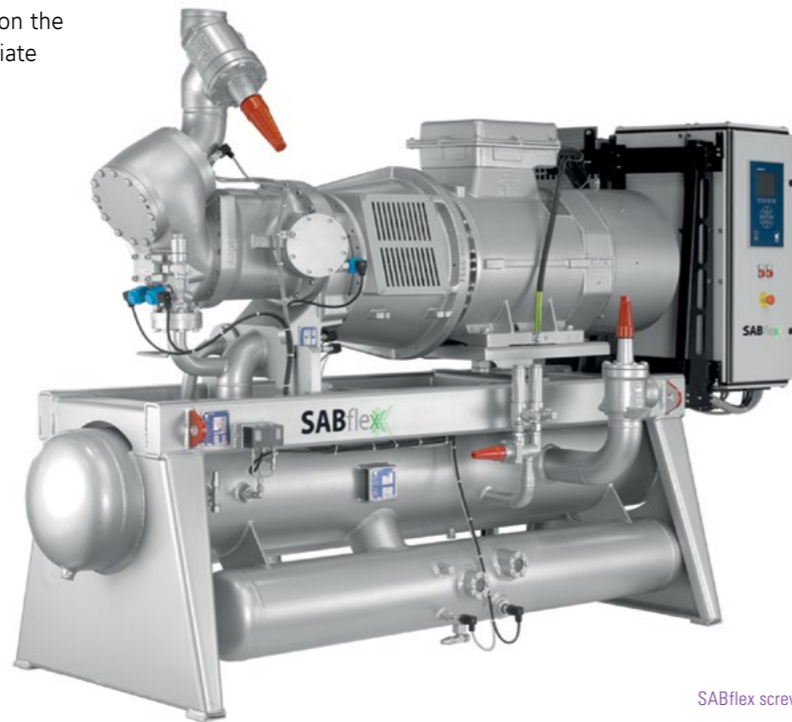

SABflex screw compressor unit

Advantages

Benefits

Stepless, skip-free capacity control ensures that output always matches requirements

Lowest possible operating costs and rapid return on investment

Consistently high performance at both full and part load

Maximum part-load efficiency and low life cycle costs

Uncomplicated design with fewer moving parts and very low vibration

Exceptional reliability and low maintenance costs

Supports Condition Based Service (CBS) schedules and the Sabroe Block Swap Concept

Optimised service/maintenance intervals, and unscheduled downtime minimised


Standardised electrical panel and drive line, factory tested prior to delivery

Rapid commissioning and maximum in-service reliability

Options

- Thermosyphon and water-cooled oil coolers, with 3-way oil temperature control valve
- Complete economiser systems
- Demand oil pump – controlled by Unisab III systems controller.
- Dual Super-filter™ oil filters.

Only for use with ammonia (R717) as refrigerant.

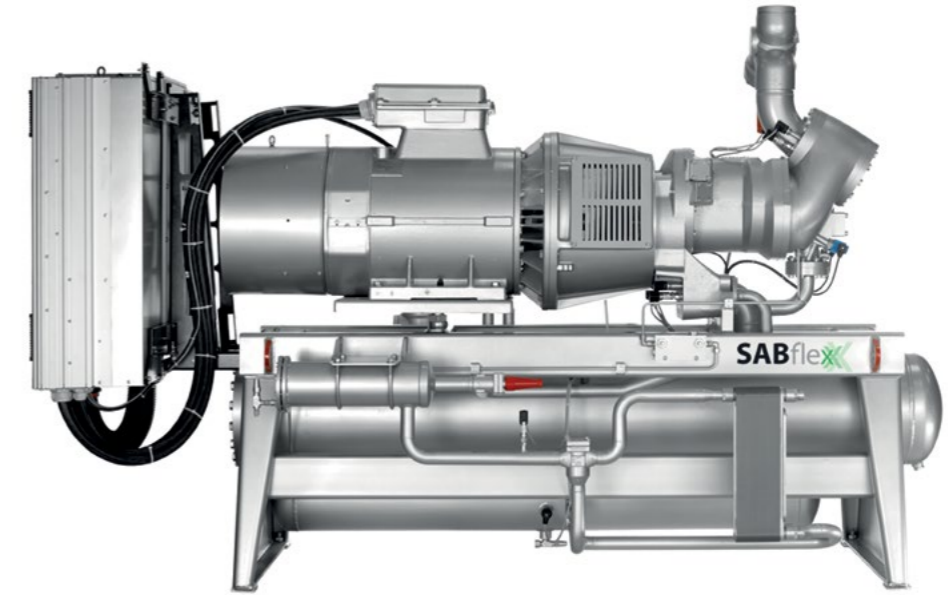

SABflex screw compressor unit

Model	Swept volume m³/h	Nominal capacities in kW for R717			Dimensions in mm L x W x H	Weight excluding motor/oil kg	Sound pressure level dB(A)
		High stage -10/+35°C	Booster -40/-10°C	With economiser -40/+35°C			
SABflex at 3600 rpm	570	355	112	104	3000 x 1300 x 2000	2200	83
SABflex at 6000 rpm	950	592	187	173	3000 x 1300 x 2000	2200	90

Sound pressure levels in free field over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.

Sabroe SAB screw compressor units


Small single-stage compressors with swept volumes of 200–1000 m³/h

Sabroe SAB screw compressors are designed and configured to tackle smaller-scale industrial refrigeration requirements where a combination of exceptional reliability, high performance and low operating costs is essential.

These small units can be used with all the most common refrigerants and process gases, and all the components are selected for good accessibility and ease of service, ensuring cost-effective maintenance.

Range

Eight different models are available to provide swept volumes of 204–1016 m³/h.

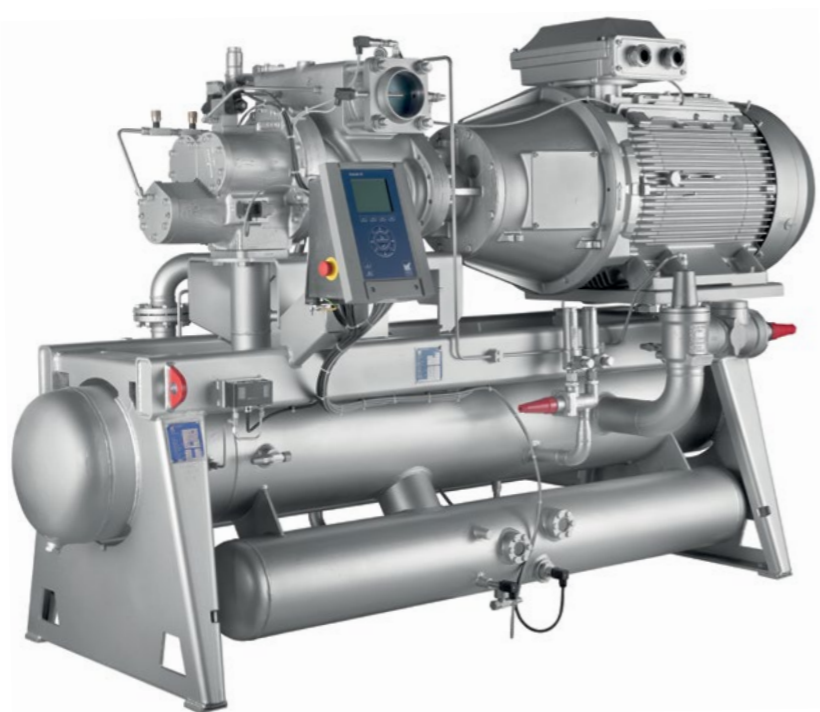

SAB 151 screw compressor unit with Unisab III systems controller

Options

- Variable-speed drive
- Thermosiphon and water-cooled oil coolers, with 3-way oil temperature control valve
- Liquid injection oil cooling (EZ Cool™)
- Dual SuperFilter II™ oil filters (on SAB 151 models only)
- Complete economiser systems
- Demand oil pump – controlled by Unisab III systems controller
- Sensors and transmitters for control by external PLC systems.

Model	Swept volume at 3000 rpm m ³ /h	Swept volume at 3600 rpm m ³ /h	Nominal capacities in kW at 3000 rpm						Dimensions in mm L x W x H	Weight excluding motor/oil kg	Sound pressure level at 3000 rpm dB(A)
			R717		R404A		With economiser				
			High stage -10/+35°C	Booster -40/-10°C	High stage -10/35°C	High stage 0/+40°C	R717 -40/+35°C	R404A -40/+35°C			
SAB 120 S	204	245	121	36	115	157	36	47	2200 x 1300 x 1500	1171	85
SAB 120 M	255	306	156	48	152	207	47	63	2200 x 1300 x 1500	1171	86
SAB 120 L	316	379	200	61	195	265	61	80	2200 x 1300 x 1500	1273	88
SAB 120 E	413	496	270	83	261	355	82	107	2200 x 1300 x 1500	1273	89
SAB 151 S	484	581	305	97	305	416	87	126	2800 x 1300 x 1700	2279	90
SAB 151 M	571	685	369	117	367	500	105	151	2800 x 1300 x 1700	2279	91
SAB 151 L	708	850	469	149	466	635	133	192	2800 x 1300 x 1800	2339	91
SAB 151 E	847	1016	568	180	560	763	161	231	2800 x 1300 x 1800	2339	92

Nominal capacities are based on 3000 rpm.
3000 rpm at 50 Hz.
3600 rpm at 60 Hz or VSD.
Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

Advantages

Benefits

Variable-speed drive and stepless capacity control ensure that capacity is always adjusted to suit requirements

Maximum part-load efficiency and lowest possible operating costs

SAB screw compressor units are all equipped with a Unisab III systems controller

More efficient operating profile, less downtime and longer service life

Cold Start™ valve lubricates the compressor, with no oil pump needed

Lower operating costs and less maintenance

SuperFilter II™ oil filter captures 99% of all particles larger than 5 microns

Longer bearing life, providing maximum reliability and savings on both maintenance and replacement

Space-saving design with small footprint

Significant reductions in space requirements

All information is subject to change without notice.



Sabroe SAB screw compressor units

Large single-stage compressors with swept volumes of 850–10900 m³/h

The bigger models of Sabroe SAB screw compressors are specifically engineered to deal with larger-scale industrial refrigeration installations in which requirements prioritise exceptional reliability, high performance and low operating costs. All the components are designed and configured to ensure low maintenance costs as a result of good accessibility and ease of service.

Like their smaller counterparts, these large-capacity compressor units can be used with all common refrigerants and process gases.

Range

Thirteen different models are available to provide swept volumes of 838–10864 m³/h.



SAB 233 screw compressor unit with Unisab III systems controller

Advantages

Benefits

Variable-speed drive and stepless capacity control ensures that capacity is always adjusted to suit requirements

Maximum part-load efficiency and lowest possible operating costs

SAB screw compressor units are all equipped with a Unisab III systems controller

More efficient operating profile, less downtime and longer service life

Cold Start™ valve lubricates the compressor, with no oil pump needed

Lower operating costs and less maintenance

SuperFilter II™ oil filter captures 99% of all particles larger than 5 microns

Longer bearing life, providing maximum reliability and savings on both maintenance and replacement

Space-saving design with small footprint

Significant reductions in space requirements

Compact oil separator

Highly efficient oil carry-over as a result of two-stage separation

Options

- Variable-speed drive
- Thermosiphon and water-cooled oil coolers, with 3-way oil temperature control valve
- Liquid injection oil cooling (EZ Cool™)
- Dual external oil filters (SuperFilter II™ type)
- Complete economiser systems
- Demand oil pump – controlled by Unisab III systems controller
- Sensors and transmitters for control by external PLC systems.

Model	Swept volume at 3000 rpm m ³ /h	Swept volume at 3600 rpm m ³ /h	Nominal capacities in kW at 3000 rpm						Dimensions in mm L x W x H	Weight excluding motor/oil kg	Sound pressure level at 3000 rpm dB(A)
			R717		R404A		With economiser				
			High stage 10/+35°C	Booster -40/-10°C	High stage -10/+35°C	High stage 0/+40°C	R717 -40/+35°C	R404A			
SAB 193 S	838	1006	541	164	524	779	155	213	3145 x 1470 x 1562	2370	84
SAB 193 L	1118	1342	723	220	709	1041	207	289	3232 x 1470 x 1562	2470	84
SAB 233 S	1475	1770	974	292	922	1404	271	379	3388 x 1497 x 2317	3350	86
SAB 233 L	1856	2227	1220	366	1199	1760	340	492	3388 x 1497 x 2342	3450	86
SAB 233 E	2258	2710	1520	456	1472	2191	424	606	4118 x 1775 x 2534	4550	86
SAB 283 S	2640	3168	1767	530	1694	2544	500	707	4121 x 1858 x 2590	5700	88
SAB 283 L	3326	3991	2215	664	2079	3190	627	874	4121 x 1858 x 2647	5850	88
SAB 283 E	3998	4798	2667	800	2524	N/A	755	1064	4406 x 2075 x 2813	7650	88
SAB 355 S	4134	4961	2785	836	2649	4033	786	1116	4350 x 2400 x 3400	8000	89
SAB 283 X	4516	5419	3033	910	2832	N/A	844	1185	4582 x 2075 x 2815	8950	88
SAB 355 L	5638	6766	3771	1131	3418	5459	1065	1457	4350 x 2400 x 3400	8250	89
SAB 355 E	7175	8610	4793	1438	4300	6940	1354	1838	5600 x 2450 x 3700	11100	89
SAB 355 X	9053	10864	N/A	1796	N/A	N/A	1681	2139	5600 x 2450 x 3700	11300	89

Nominal capacities are based on 3000 rpm.

3000 rpm at 50 Hz.

3600 rpm at 60 Hz or VSD.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.



Sabroe SAB 157 HR high-pressure screw compressor units


Variable-speed high-pressure screw compressor units with swept volumes of 100–600 m³/hour, for use with CO₂ as refrigerant

These unique high-pressure compressor units are ideal for low-temperature two-stage freezer installations, such as carbon dioxide-ammonia (R744–R717) cascade refrigeration systems. The 52 bar configuration makes it possible to undertake freezing and defrosting in one single stage with condensing temperatures up to 15°C.

The game-changer SAB 157 HR design radically shifts the boundaries between low-stage and high-stage refrigeration, by keeping the inter-stage temperature above 0°C so that the thermal energy in the discharge gas can be used to defrost the cooling element (hot gas defrosting).

This in turn makes it possible to make big saving on installation, piping and compressor costs because a single SAB 157 HR unit can replace multiple compressors using traditional refrigerants.

Right from the outset, SAB 157 HR units are designed for variable-speed operation and maximum flexibility, doing away with traditional capacity slide valves. Capacity range: 1000–6000 rpm.

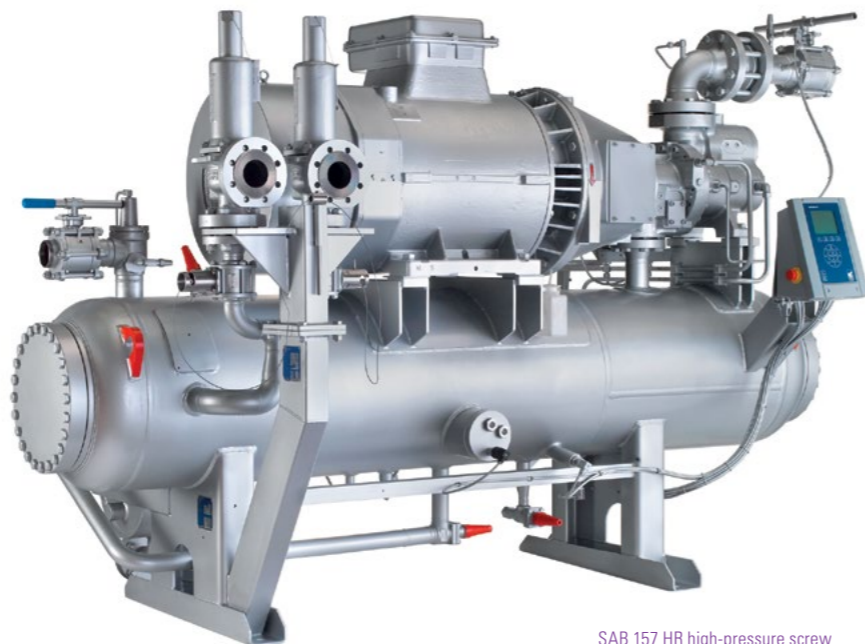

SAB 157 HR high-pressure screw compressor unit

Range

One model is available to provide swept volumes of 600 m³/hour at 6000 rpm.

Options

- Thermosyphon and water-cooled oil coolers, with 3-way oil temperature control valve
- Dual external oil filters



SAB 157 HR high-pressure screw compressor block



Compressors

Model	Swept volume at 6000 rpm m ³ /h	Capacities in kW at 6000 rpm			Dimensions in mm L x W x H	Weight excluding motor/oil kg	Sound pressure level dB(A)
		R744 -35/+5°C	-45/-5°C	-50/-5°C			
SAB 157 HR	596	939	630	585	3300 x 1500 x 2100	2600	on request

Nominal capacities are based on 6000 rpm at 60 Hz. Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without previous notice

Significant advantages

Customer benefits

Stepless, skip-free capacity control ensures that output always matches requirements

Lowest possible operating costs and rapid return on investment

Consistently high performance at both full and part load

Maximum part-load efficiency and low life cycle costs ??

Unique 52 bar unit designed specifically for CO₂ applications

Makes it possible to undertake freezing and defrosting in one stage

Space-saving small footprint, with fewer moving parts and very low vibration

Exceptional reliability and low maintenance costs

Supports Condition Based Service (CBS) schedules and the Sabroe Block Swap Concept

Optimised service/maintenance intervals, with a minimum of unscheduled downtime

Chillers based on Sabroe core technologies

Chillers meet the demand for indirect cooling

Many industrial and commercial processes and installations require indirect rather than direct cooling. This is normally provided by special chiller units, in which a compressor – rather than acting directly – cools a secondary refrigerant that then provides the desired cooling effect.

The use of secondary refrigerants – water, glycol, brine, etc. – is increasing rapidly because of the demand for safer installations and an intense, continuous focus on energy efficiency.

Another driver lies in both national and international legislation that requires phasing out particular refrigerants because of their environmental impacts.

Meeting the demand for chillers


Sabroe therefore provides a range of energy-efficient standardised packaged chiller configurations, all based on high-efficiency Sabroe reciprocating and screw compressors that are world-renowned for their reliability.

As a result, Sabroe chillers are at the forefront of this rapidly developing specialist market.

Compliance

All Sabroe chiller units are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies. Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

Sabroe chiller programme

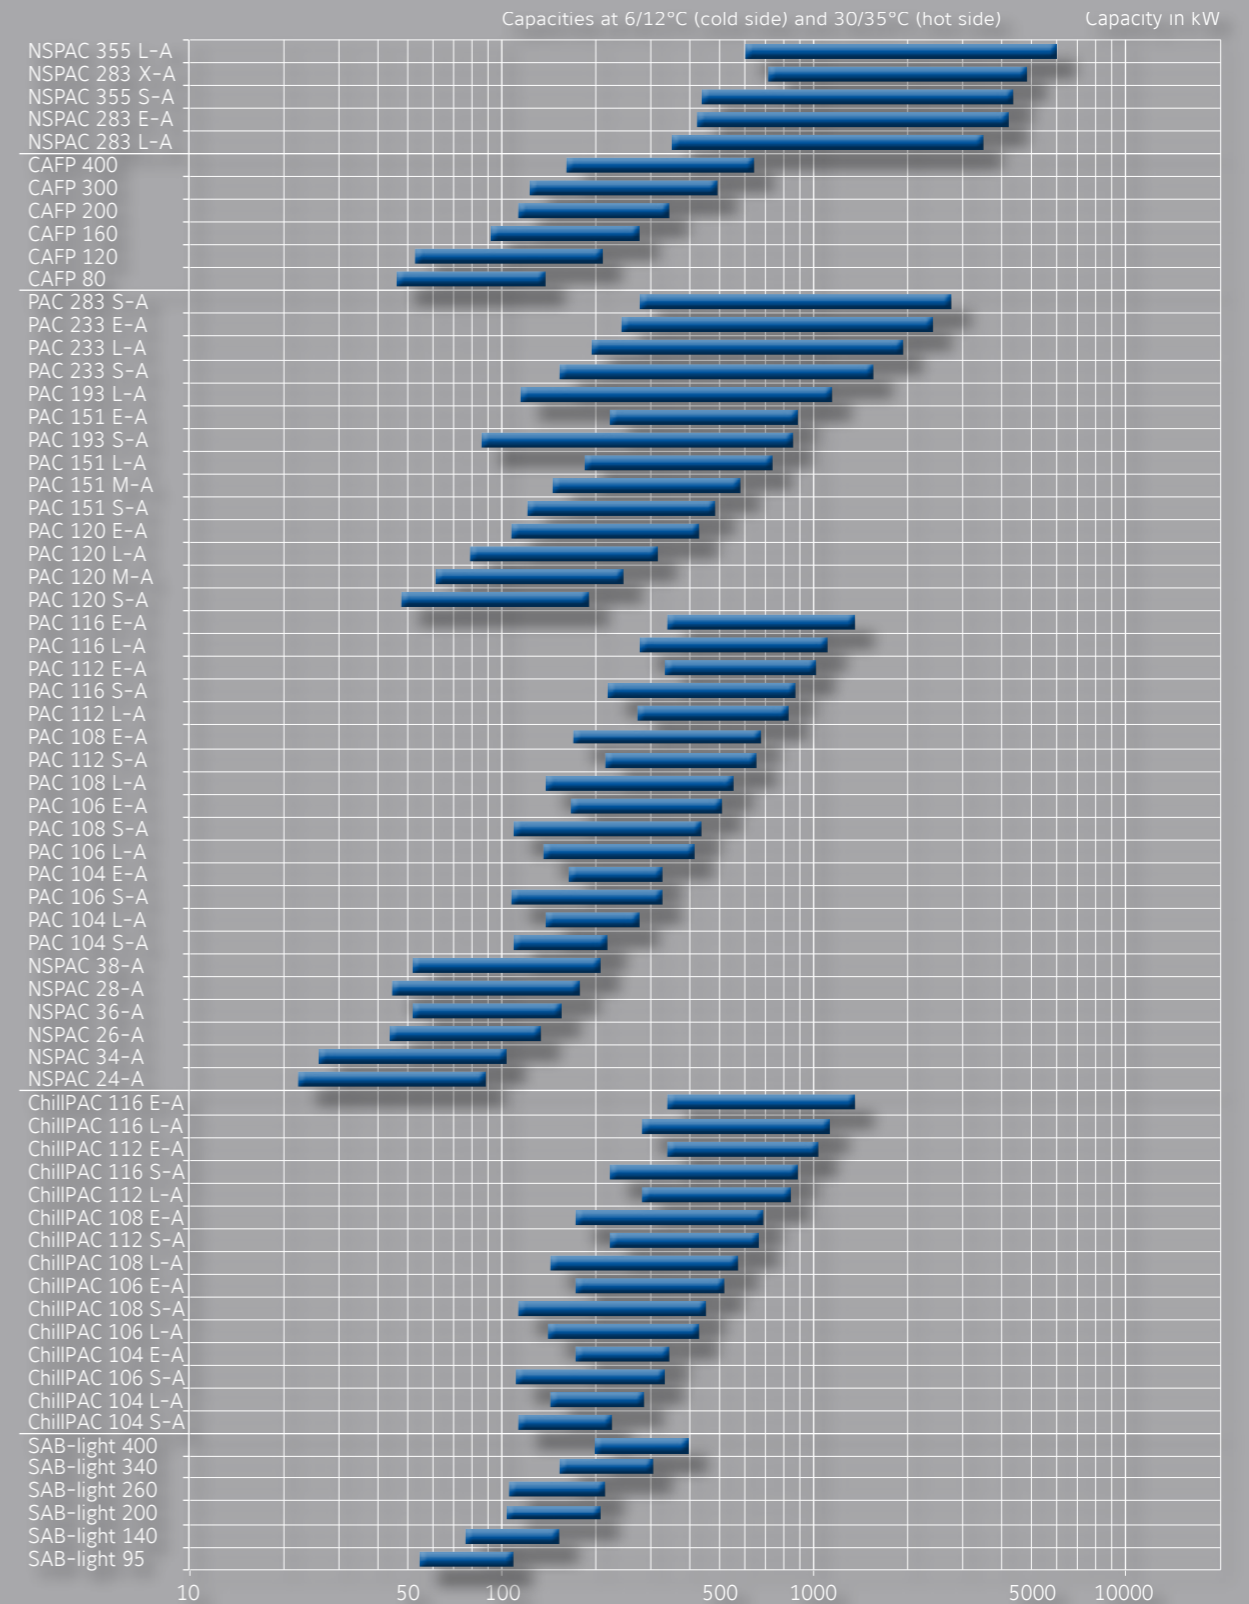

Sabroe PAC chillers

Packaged ammonia chillers based on reciprocating compressors, with a 50–1400 kW capacity range

PAC ammonia-based chillers are fully integrated packaged units, designed to take full advantage of the many different models of ultra-reliable Sabroe reciprocating compressors. They are popular because there is such a wide range of different standard sizes, and they are also particularly easy to customise to meet specific requirements.

The integrated design, with the plate evaporator/condenser, oil separator and control system all built in, means PAC units provide exceptional refrigeration capacity while only taking up a minimum of space. They are ideal for use in indirect cooling set-ups, and in installations where it is important to use future-compatible natural refrigerants, such as ammonia.

The advanced technology and the well-matched integration of the component systems make these chillers so energy efficient that their low operating costs make them the most economical choice over the lifetime of a refrigeration plant.



PAC 116 chiller

Range

There are 21 different standard models in this range of packaged chillers, with capacities ranging from 45 kW to 1419 kW.

Customised configurations are also available for use with remote air-cooled or evaporative condensers, and for twin or multi-packages, designed to provide particularly large cooling capacities.

Advantages

Factory-assembled, pre-tested packaged units

Comprehensive selection of compressor capacities, making it easier to match particular requirements

Very easy access for service

Indirect cooling and uncomplicated flooded evaporating system, using natural ammonia (R717) only

Plate evaporator/condenser are easy to open and service

Benefits

Easy pre-commissioning makes installation and running-in both faster and cheaper. Factory acceptance tests (FAT) available as an option

Avoid paying for greater capacity than needed

Improves safety, ensures maximum reliability and global sourcing of parts

Greater safety and outstanding reliability

Routine checks/service can be carried out by operator's own staff

Options

- Variable-speed drive (VSD)
- Soft-starter or Y/D starter
- De-superheater
- Sub-cooler
- External condenser
- Control panel mounted separately
- NSPAC and PAC-S and -L models: 1800 rpm at 60 Hz or VSD
- Factory acceptance tests (FAT).

Water: inlet 12°C, outlet 7°C

Type	Capacity kW	E-motor kW	R717 charge kg	Dry weight kg	Dimensions in mm			Sound level dB(A)
					L	W	H	
NSPAC 24-A	92	22	20	1400	2500	1500	2200	67
NSPAC 34-A	108	22	21	1450	2500	1500	2200	68
NSPAC 26-A	138	30	22	1450	2500	1500	2200	68
NSPAC 36-A	161	37	28	1600	2700	1500	2200	69
NSPAC 28-A	184	37	32	1600	2700	1500	2200	69
NSPAC 38-A	215	45	34	1650	2900	1500	2200	70
PAC 104 S-A	225	45	48	3100	3300	1850	2300	77
PAC 104 L-A	286	55	49	3250	3300	1850	2300	77
PAC 106 S-A	337	75	51	3500	3300	1850	2300	78
PAC 104 E-A	349	75	51	3400	3300	1850	2300	78
PAC 106 L-A	429	90	54	3550	3300	1850	2300	79
PAC 108 S-A	452	90	54	3700	3300	1850	2300	79
PAC 106 E-A	527	110	57	3700	3550	1850	2300	79
PAC 108 L-A	576	110	58	3900	3550	1850	2300	80
PAC 112 S-A	679	132	73	4650	4130	1850	2450	80
PAC 108 E-A	702	160	74	4300	3850	1850	2450	80
PAC 112 L-A	863	200	78	5000	4130	1850	2450	81
PAC 116 S-A	905	200	79	5350	4130	1850	2450	81
PAC 112 E-A	1054	250	84	5300	4550	1850	2450	81
PAC 116 L-A	1151	250	88	5650	4900	1850	2450	82
PAC 116 E-A	1419	280	137	6300	5750	2000	2600	82

Ethylene glycol 30%: inlet -4°C, outlet -8°C

Type	Capacity kW	E-motor kW	R717 charge kg	Dry weight kg	Dimensions in mm			Sound level dB(A)
					L	W	H	
NSPAC 24-C	45	22	19	1400	2500	1500	2200	68
NSPAC 34-C	53	22	20	1400	2500	1500	2200	68
NSPAC 26-C	67	30	21	1450	2500	1500	2200	68
NSPAC 36-C	79	30	22	1500	2600	1500	2200	69
NSPAC 28-C	89	37	30	1550	2600	1500	2200	69
NSPAC 38-C	104	37	32	1600	2700	1500	2200	70
PAC 104 S-C	106	37	47	3000	3300	1850	2300	76
PAC 104 L-C	139	55	48	3050	3300	1850	2300	77
PAC 106 S-C	159	55	49	3250	3300	1850	2300	78
PAC 104 E-C	174	75	50	3200	3300	1850	2300	77
PAC 106 L-C	208	75	51	3450	3300	1850	2300	79
PAC 108 S-C	212	75	52	3550	3300	1850	2300	79
PAC 106 E-C	266	90	56	3600	3300	1850	2300	79
PAC 108 L-C	280	110	55	3650	3300	1850	2300	80
PAC 112 S-C	321	110	68	4400	4130	1850	2450	80
PAC 108 E-C	355	132	74	4100	3600	1850	2450	80
PAC 112 L-C	419	160	74	4600	4130	1850	2450	81
PAC 116 S-C	428	160	74	5150	4130	1850	2450	81
PAC 112 E-C	532	200	83	5050	4130	1850	2450	81
PAC 116 L-C	559	200	80	5400	4130	1850	2450	82
PAC 116 E-C	717	250	132	6000	4550	2000	2600	83

Condenser: water inlet 30°C, outlet 35°C

The above data are only valid for the stated temperatures and operating conditions.

Capacities are nominal at 1500 rpm.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

Compliance

All Sabroe chiller units are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies.

Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

All information is subject to change without notice.

Sabroe PAC chillers

Packaged ammonia chillers based on screw compressors, with a 100–6200 kW capacity range

PAC ammonia-based chillers are fully integrated packaged units, designed to take full advantage of the many different models of ultra-reliable Sabroe screw compressors. They are popular because there is such a wide range of different standard sizes, and they are also particularly easy to customise to meet specific requirements.


The integrated design, with the plate evaporator/condenser, oil separator and control system all built in, means PAC units provide exceptional refrigeration capacity while only taking up a minimum of space. They are ideal for use in indirect cooling set-ups, and in installations where it is important to use future-compatible natural refrigerants, such as ammonia.

The advanced technology and the well-matched integration of the component systems make these chillers so energy efficient that their low operating costs make them the most economical choice over the lifetime of a refrigeration plant.

Range

There are 19 different standard models in this range of packaged chillers, with capacities ranging from approx. 109 kW to 6180 kW.

Customised configurations are also available for use with remote air-cooled or evaporative condensers, and for twin or multi-packages, designed to provide particularly large cooling capacities.

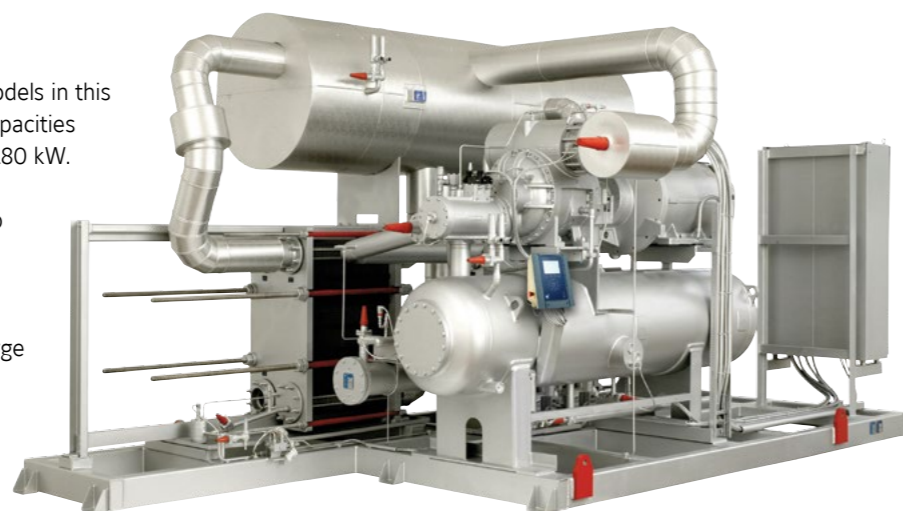

PAC 233 chiller

Advantages

Factory-assembled, pre-tested packaged units

Comprehensive selection of compressor capacities, making it easier to match particular requirements

Very easy access for service

Indirect cooling and uncomplicated flooded evaporating system, using natural ammonia (R717) only

Plate evaporator/condenser are easy to open and service

Benefits

Easy pre-commissioning makes installation and running-in both faster and cheaper. Factory acceptance tests (FAT) available as an option

Avoid paying for greater capacity than needed

Improves safety, ensures maximum reliability and global sourcing of parts

Greater safety and outstanding reliability

Routine checks/service can be carried out by operator's own staff

Options

- Variable-speed drive (VSD)
- Soft-starter or Y/D starter
- De-superheater
- Sub-cooler
- External condenser
- Control panel mounted separately
- 3600 rpm at 60 Hz or VSD
- Factory acceptance tests (FAT).

Water: inlet 12°C, outlet 7°C

Type	Capacity kW	E-motor kW	R717 charge kg	Operational weight kg	Dimensions in mm			Sound level dB(A)
					L	W	H	
PAC 120 S-A	197	55	38	4000	4310	1870	2260	82
PAC 120 M-A	254	75	40	4150	4310	1870	2260	83
PAC 120 L-A	326	75	50	4550	4310	1870	2260	84
PAC 120 E-A	441	110	54	4800	4560	1870	2360	86
PAC 151 S-A	496	132	55	5600	3800	2070	2360	88
PAC 151 M-A	600	132	59	5700	3940	2070	2360	89
PAC 151 L-A	761	200	75	6200	3940	2090	2450	89
PAC 193 S-A	885	200	81	6400	4600	2350	2450	82
PAC 151 E-A	921	200	80	6350	4600	2090	2450	90
PAC 193 L-A	1180	250	91	7000	5300	2350	2450	82
PAC 233 S-A	1595	355	169	11500	5500	2900	3200	83
PAC 233 L-A	2009	400	184	12500	6700	3000	3200	83
PAC 233 E-A	2481	500	211	15200	6700	3050	3400	84
PAC 283 S-A	2859	630	230	17000	7500	3400	3400	85
NSPAC 283 L-A	3596	800	350	20500	7300	3700	4500	83
NSPAC 283 E-A	4367	900	391	25500	8500	3700	4700	83
NSPAC 355 S-A	4516	1000	410	28000	8500	4000	4700	83
NSPAC 283 X-A	4939	1000	450	30000	9100	4000	4700	83
NSPAC 355 L-A	6180	1250	700	40000	10000	4000	6000	83

Ethylene glycol 30%: inlet -4°C, outlet -8°C

Type	Capacity kW	E-motor kW	R717 charge kg	Operational weight kg	Dimensions in mm			Sound level dB(A)
					L	W	H	
PAC 120 S-C	109	55	38	4000	4310	1870	2260	82
PAC 120 M-C	141	75	39	4150	4310	1870	2260	83
PAC 120 L-C	180	75	49	4500	4310	1870	2360	84
PAC 120 E-C	243	110	53	4700	4310	1870	2360	86
PAC 151 S-C	275	110	54	5550	3940	2070	2360	88
PAC 151 M-C	333	132	57	5600	3940	2070	2360	89
PAC 151 L-C	422	160	73	6100	3940	2090	2450	89
PAC 193 S-C	489	200	78	6250	4600	2350	2450	82
PAC 151 E-C	512	200	77	6200	4290	2090	2450	90
PAC 193 L-C	653	250	87	6750	5000	2350	2450	82
PAC 233 S-C	880	315	161	11250	5200	2750	3200	84
PAC 233 L-C	1103	400	175	12100	5800	2750	3200	84
PAC 233 E-C	1373	500	198	14700	6500	2800	3400	84
PAC 283 S-C	1597	560	211	16350	6700	3150	3400	86
PAC 283 L-C	1995	710	230	19000	7100	3700	3400	88
NSPAC 283 E-C	2412	900	374	24500	7300	3700	4500	84
NSPAC 355 S-C	2525	900	380	26000	8000	4000	4700	84
NSPAC 283 X-C	2752	1000	400	28000	8500	4000	4700	84
NSPAC 355 L-C	3418	1200	600	38000	9500	4000	6000	84

Condenser: water inlet 30°C, outlet 35°C

The above data are only valid for the stated temperatures and operating conditions.

Capacities are nominal at 3000 rpm.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

Compliance

All Sabroe chiller units are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies.

Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

All information is subject to change without notice.

Sabroe ChillPAC™ chillers

Extremely compact packaged ammonia chillers based on reciprocating compressors, with a 100–1400 kW capacity range


ChillPAC ammonia-based chillers are designed from the outset to achieve an ultra-compact format, so narrow that it can even pass through a normal doorway.

The fully integrated design, with an extra-compact shell-and-plate evaporator/condenser, oil separator and control system all built in, means ChillPAC units provide exceptional refrigeration capacity while only taking up a minimum of space and taking full advantage of the many different models of ultra-reliable Sabroe reciprocating compressors.

ChillPAC chillers are ideal in installations where there is only limited space, and where there are restrictions on the refrigerant charge used.

Range

There are 15 different models in the standard ChillPAC range, with capacities ranging from 116 kW to 1398 kW.

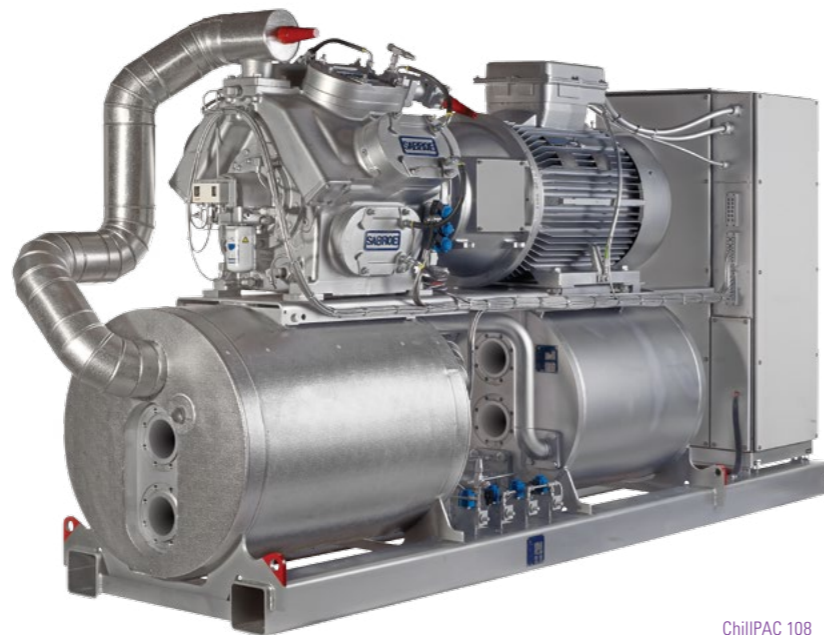

ChillPAC 108

Advantages

- Factory-assembled, pre-tested packaged units
- Exceptionally compact design and fully integrated configuration results in less than half the footprint of bespoke chiller designs
- Indirect cooling and uncomplicated flooded evaporating system, using natural ammonia (R717) only
- Exceptional COP and outstanding part-load performance
- Refrigerant charge 50% smaller than with conventional chillers, because of special condenser/evaporator design

Benefits

- Easy pre-commissioning makes installation and running-in both faster and cheaper. Factory acceptance tests (FAT) available as an option
- Major savings on both weight and space, resulting in lower installation costs. Much less need for expensive separate machinery rooms
- Greater safety and outstanding reliability
- Greater cooling effect from a smaller refrigerant charge
- Higher output per unit kW/kg refrigerant, lower unit cost and lower installation costs

Options

- Variable-speed drive (VSD)
- Soft-starter or Y/D starter
- De-superheater
- Sub-cooler
- External condenser
- Control panel mounted separately
- S and L models: 1800 rpm at 60 Hz or VSD
- Factory acceptance tests (FAT).

Water chillers (Water: inlet 12°C, outlet 7°C)

Type	Cooling capacity	E-motor	R717 charge	Dry weight	Dimensions in mm			Sound level dB(A)
	kW	kW	kg	kg	L	W	H	
ChillPAC 104 S-A	233	45	14	2301	2900	1000	2000	78
ChillPAC 104 L-A	294	55	15	2410	2900	1000	2000	79
ChillPAC 106 S-A	346	75	17	2727	2900	1000	2000	79
ChillPAC 104 E-A	357	75	17	2652	2900	1000	2000	79
ChillPAC 106 L-A	440	90	21	2950	2900	1000	2000	80
ChillPAC 108 S-A	464	90	22	3060	2900	1000	2000	80
ChillPAC 106 E-A	536	110	24	3225	3100	1000	2000	81
ChillPAC 108 L-A	588	110	26	3526	3100	1000	2000	82
ChillPAC 112 S-A	690	132	29	4315	4000	1000	2200	82
ChillPAC 108 E-A	715	132	30	3880	3300	1000	2000	82
ChillPAC 112 L-A	878	160	36	4738	4500	1000	2200	83
ChillPAC 116 S-A	921	200	37	5044	4500	1000	2200	83
ChillPAC 112 E-A	1066	200	41	5196	4600	1000	2200	83
ChillPAC 116 L-A	1167	250	45	5556	4700	1000	2200	83
ChillPAC 116 E-A	1398	315	49	5878	5000	1000	2200	84

Brine chillers (Ethylene glycol 30%: inlet -4°C, outlet -8°C)

Type	Cooling capacity	E-motor	R717 charge	Dry weight	Dimensions in mm			Sound level dB(A)
	kW	kW	kg	kg	L	W	H	
ChillPAC 104 S-C	116	37	13	2253	2700	1000	2000	78
ChillPAC 104 L-C	150	55	15	2378	2900	1000	2000	79
ChillPAC 106 S-C	172	55	15	2505	2900	1000	2000	79
ChillPAC 104 E-C	185	75	17	2586	2900	1000	2000	79
ChillPAC 106 L-C	222	75	18	2701	2900	1000	2000	80
ChillPAC 108 S-C	227	75	18	2766	2900	1000	2000	80
ChillPAC 106 E-C	272	90	20	2866	2900	1000	2000	80
ChillPAC 108 L-C	295	110	22	3091	3100	1000	2000	82
ChillPAC 112 S-C	339	110	24	3696	3800	1000	2200	82
ChillPAC 108 E-C	363	132	25	3523	3300	1000	2000	82
ChillPAC 112 L-C	440	160	29	4290	4200	1000	2200	83
ChillPAC 116 S-C	450	160	29	4390	4200	1000	2200	83
ChillPAC 112 E-C	544	200	35	4733	4300	1000	2200	83
ChillPAC 116 L-C	586	200	37	4898	4300	1000	2200	83
ChillPAC 116 E-C	718	250	43	5322	4300	1000	2200	83

Condenser: water inlet 30°C, outlet 35°C.

The above data are only valid for the stated temperatures and operating conditions.

Capacities are nominal at 1500 rpm.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

Compliance

All Sabroe chiller units are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies. Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

All information is subject to change without notice.


Sabroe CAFP CO₂/ammonia freezers

Compact packaged freezer systems using reciprocating compressors, and CO₂/ammonia as refrigerant, with a 100–800 kW capacity range

The highly customised Sabroe CAFP freezer systems are based on a cascade system that combines the advantages of CO₂ on the low-temperature side and ammonia on the high-temperature side.

These packaged systems are built around Sabroe reciprocating compressors that use CO₂ as refrigerant, which gives them a significantly greater cooling capacity than corresponding compressors using ammonia. This in turn makes the low-temperature compressor much smaller, and the whole package significantly more compact than traditional two-stage ammonia-based freezer systems.

As a result, each standard CAFP package can be fitted inside a standard 20-foot shipping container, if required. This does away with the need for a special machinery space, and the freezer installation can easily be moved if required. Compared with conventional ammonia-based two-stage or single-stage systems with economisers, a CAFP unit uses significantly less power in the temperature range down to –55°C. This results in energy savings of as much as 15% compared with traditional two-stage ammonia systems, and up to 45% compared with single-stage set-ups.

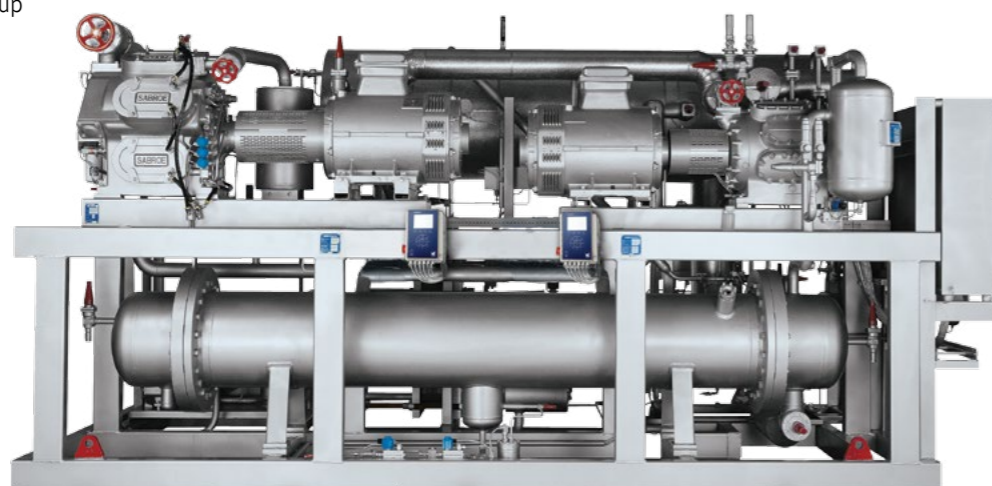

CAFP unit controlled and monitored by Unisab III systems controller

Advantages

Benefits

Compact design that fits inside a standard 20-foot container

Big savings on installation costs

High COP and extremely low power consumption, even at part load

Low operating costs

Use of CO₂ as low-temperature refrigerant reduces piping complexity and costs

Reduces installation costs

Very small ammonia charge, located on the unit itself

No risk of ammonia leaks in production areas, cold stores and working areas

CO₂ is a simple, inexpensive natural refrigerant

Low operating costs

Range

There are 6 standard models in this range of freezer systems, with capacities ranging from 87 kW to 793 kW.

All CAFP units are operationally tested with refrigerant before dispatch. Factory acceptance tests (FAT) available.

Standard equipment

- Double control panel including Unisab III systems controller
- CO₂ pump separator including two pumps (one standby)
- Shell-and-tube cascade cooler with double-tube sheet to minimise any risk of CO₂ and ammonia mixing
- Standstill cooling unit, with separate control panel and power supply, to limit CO₂ pressure
- Automatic oil recovery system in both circuits
- Water-cooled condenser (plate heat exchanger type) on ammonia side
- Insulation of all cold parts.

Options

- Variable-speed drive
- Titanium plates in condenser
- Oversized CO₂ pump separator for high CO₂ evaporator volume
- Oversized CO₂ pumps for higher circulation rate
- Oversized ammonia condenser for higher cooling water temperature
- Fully welded shell-and-tube cascade cooler
- External interstage load, including a brine cooler on the R717 side of the cascade cooler.
- Special version for use with remote condenser
- Configurations for use with HCFC refrigerants instead of ammonia.

Compliance

All Sabroe chiller units are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies. Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

Model	Evaporation temperature °C	Capacity kW	Power consumption kW	Compressors R744/R717	NH ₃ charge approx. kg	Max. CO ₂ charge l	Dimensions in mm L x W x H	Weight kg	Sound pressure level dB(A)
CAFP 80	-50	87	64	HPO 24 / SMC 104 S	45	800	5200 x 2600 x 2800	8000	78
CAFP 80	-45	112	74	HPO 24 / SMC 104 L	45	800	5200 x 2600 x 2800	8500	80
CAFP 80	-40	144	84	HPO 24 / SMC 104 E	45	800	5200 x 2600 x 2800	9000	79
CAFP 80	-35	144	82	HPO 24 / SMC 106 S	45	800	5200 x 2600 x 2800	9000	79
CAFP 120	-50	131	94	HPO 26 / SMC 106 S	55	800	5200 x 2600 x 2800	9500	80
CAFP 120	-45	169	110	HPO 26 / SMC 106 L	55	800	5200 x 2600 x 2800	9500	80
CAFP 120	-40	217	126	HPO 26 / SMC 106 E	55	800	5200 x 2600 x 2800	9500	80
CAFP 120	-35	264	137	HPO 26 / SMC 108 L	55	800	5200 x 2600 x 2800	10000	82
CAFP 160	-50	174	125	HPO 28 / SMC 108 S	60	800	5200 x 2600 x 2800	10500	80
CAFP 160	-45	223	147	HPO 28 / SMC 108 L	60	800	5200 x 2600 x 2800	11000	82
CAFP 160	-40	288	167	HPO 28 / SMC 108 E	60	800	5200 x 2600 x 2800	11000	82
CAFP 160	-35	363	188	HPO 28 / SMC 112 L	60	800	5900 x 2800 x 3000	12000	83
CAFP 200	-50	211	150	HPC 104 / SMC 106 E	80	800	5200 x 2600 x 2800	12000	80
CAFP 200	-45	277	177	HPC 104 / SMC 108 E	80	800	5200 x 2600 x 2800	12000	82
CAFP 200	-40	353	200	HPC 104 / SMC 112 L	80	800	5900 x 2800 x 3000	13500	82
CAFP 200	-35	415	214	HPC 104 / SMC 112 L	80	800	5900 x 2800 x 3000	13500	83
CAFP 300	-50	324	228	HPC 106 / SMC 112 L	120	1650	6300 x 3200 x 3100	14000	82
CAFP 300	-45	416	263	HPC 106 / SMC 112 E	120	1650	6300 x 3200 x 3100	14000	82
CAFP 300	-40	511	290	HPC 106 / SMC 116 L	120	1650	6300 x 3200 x 3100	15000	83
CAFP 300	-35	599	310	HPC 106 / SMC 116 L	120	1650	6300 x 3200 x 3100	15500	83
CAFP 400	-50	421	296	HPC 108 / SMC 112 E	155	1650	6300 x 3200 x 3100	16000	82
CAFP 400	-45	520	332	HPC 108 / SMC 116 L	155	1650	6300 x 3200 x 3100	17000	83
CAFP 400	-40	667	375	HPC 108 / SMC 116 E	155	1650	6700 x 3200 x 3200	17000	83
CAFP 400	-35	793	398	HPC 108 / SMC 116 E	155	1650	6700 x 3200 x 3200	18000	83

Condenser: water inlet 25°C, outlet 30°C. Capacities are nominal, 1500 rpm at 50 Hz. Power consumption applies to compressors only.

Dry weight (approx.). Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice.

Sabroe SAB-light™ air-cooled chillers

Compact air-cooled chillers for outdoor installation, based on a screw compressor, with a 130–430 kW capacity range

The SAB-light air-cooled chiller is a particularly compact design that uses V-coil condensers to substantially reduce the overall footprint. The screw compressor and fully brazed plate heat exchanger are mounted underneath the V-coils, resulting in a height of 2.9 m and a width of only 1.3 m.

SAB-light units provide a cost-effective alternative to traditional air conditioning, chilled rooms and industrial/process refrigeration. They are designed for quiet running and outdoor operation, and a special ultra-low-noise version is available.


SAB-light uses a small propane refrigerant charge, providing an attractive, economical and environmentally responsible alternative to air-cooled chillers that use HFCs as refrigerant.

Range

There are 6 standard models in this range of air-cooled chillers, with capacities ranging from 129 kW to 428 kW.



SAB-light air-cooled chiller

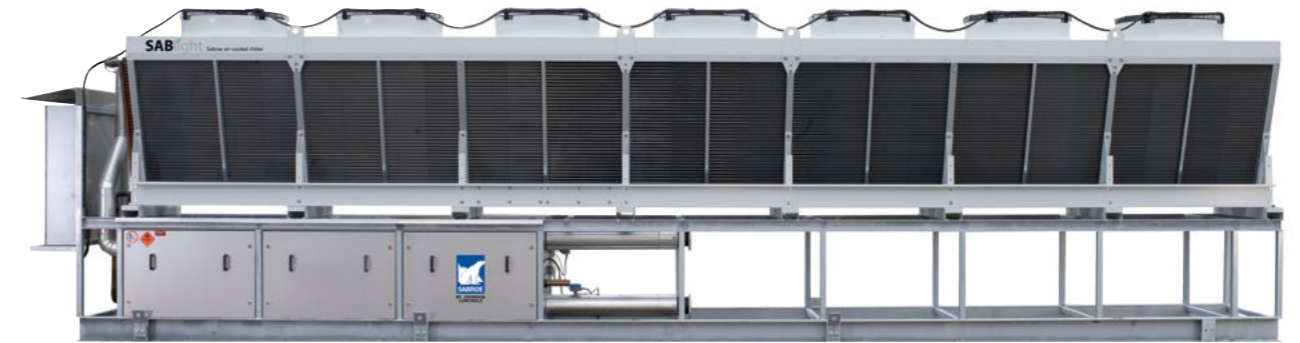

SAB-light air-cooled chiller

Chillers

Standard equipment

- Control and monitoring system
- Variable-speed drive
- Hot-dip galvanised base frame
- Screw compressor.

Options

- External communication via network and industrial-standard bus systems
- Evaporator heating elements for frost-proofing
- Epoxy coating of condenser surface
- Oil cooler
- Models operating with inlet temperatures below 0°C available on request.

Compliance

All SAB-light air-cooled chillers are fully compliant with PED (CE marked and PED approved). Approval in accordance with other classification societies is available on request.

Technical data

Type	Cooling capacity kW	COP ESEER	COP IPLV	R290 charge kg	Dry weight kg	Dimensions in mm			Power consumption kW	Nominal load current A	Sound level dB(A)
						L	W	H			
SAB-light A95-1	129	4.6	5.3	20	1900	3860	1250	2835	43	95	55
SAB-light A95-2	128	4.6	5.3	20	1900	3860	1250	2835	38	95	45
SAB-light A140-1	180	5.0	5.4	24	2300	5260	1250	2835	55	110	55
SAB-light A140-2	188	5.1	5.7	24	2300	5260	1250	2835	48	115	45
SAB-light A200-1	237	5.0	5.4	24	2500	5260	1250	2835	72	155	55
SAB-light A200-2	238	4.9	5.5	32	3000	6660	1250	2835	69	160	45
SAB-light A260-1	297	5.1	5.5	32	3000	6660	1250	2835	79	190	55
SAB-light A260-2	301	5.2	5.6	40	3300	8060	1250	2835	82	190	45
SAB-light A340-1	350	5.0	5.5	40	3700	8060	1250	2835	105	215	55
SAB-light A340-2	346	5.0	5.5	48	4200	9460	1250	2915	103	220	45
SAB-light A400-1	432	5.3	5.7	48	4400	9460	1250	2915	118	250	55
SAB-light A400-2	428	5.3	5.7	56	4800	10860	1250	2915	121	250	45

Capacities are nominal and based on water temperature 12/7°C, ambient temperature 30°C. Two or more units can be built together if larger capacities are required.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

ESEER = European Seasonal Energy Efficiency Ratio (Eurovent Institute, Europe).

IPLV according to ARI, Air-conditioning and Refrigeration Institute standard (USA).

Fans and VSD are included in the power consumption.

All information is subject to change without notice.

Advantages

Benefits

Compact design with small footprint

Easy to mount outdoors – no special machinery room required

Quiet while running
Available in both low and ultra-low noise versions

Can be placed close to occupied buildings

Variable-speed drive fitted to both compressor and fans, providing very high coefficient of performance (COP), even under part-load conditions

Low power consumption, which means low operating costs

Designed for maximum safety, with very small natural refrigerant charge (propane R290)

No expenditure on special safety precautions

Easy to mount, install and connect up

Low installation costs and rapid commissioning

Straightforward, uncomplicated construction

Low maintenance costs

Heat pumps based on Sabroe core technologies

Heat pump pioneer

Sabroe is one of the world's leading suppliers of heat pump systems for commercial and industrial use. We were one of the pioneers of the whole idea of the energy benefits to be reaped from using heat pumps in industry – long before they became greentech-fashionable.

Sabroe HeatPAC heat pumps are the ideal solution for effectively exploiting low-temperature waste heat, and turning it into hot water (up to 90°C), using only a minimum of electrical energy.


Ammonia as refrigerant

Sabroe industrial heat pumps use natural ammonia (R717) as refrigerant. Each unit is customised for the specific use and the particular installation, making sure that a minimum of thermal energy is used to provide maximum effect.



Customised two-stage heat pump

Sabroe heat pump programme

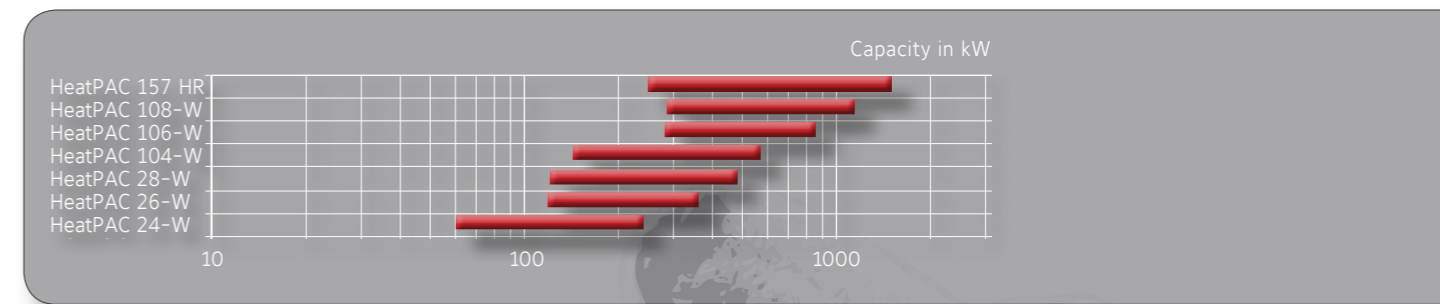

Sabroe HeatPAC heat pumps


Ammonia-based heat pumps using a reciprocating compressor, with a 240–1200 kW capacity range

HeatPAC units are an extremely compact heat pump based on ultra-reliable Sabroe HPO/HPC high-pressure reciprocating compressors, using ammonia as refrigerant. These highly customisable integrated units, featuring an uncomplicated flooded evaporating system, provide exceptional heat pump capacity from the smallest possible footprint, and with only a very small refrigerant charge. They are designed to provide a cost-effective way to tackle needs for cooling and heating at the same time, providing an extremely high coefficient of performance (COP).

Sabroe HeatPAC heat pumps are the ideal solution for effectively exploiting low-temperature waste heat, and turning it into hot water (up to 70°C), using only a minimum of electrical energy.

Range

There are 6 standard models in this range of heat pump systems, with capacities ranging from 240 kW to 1149 kW.

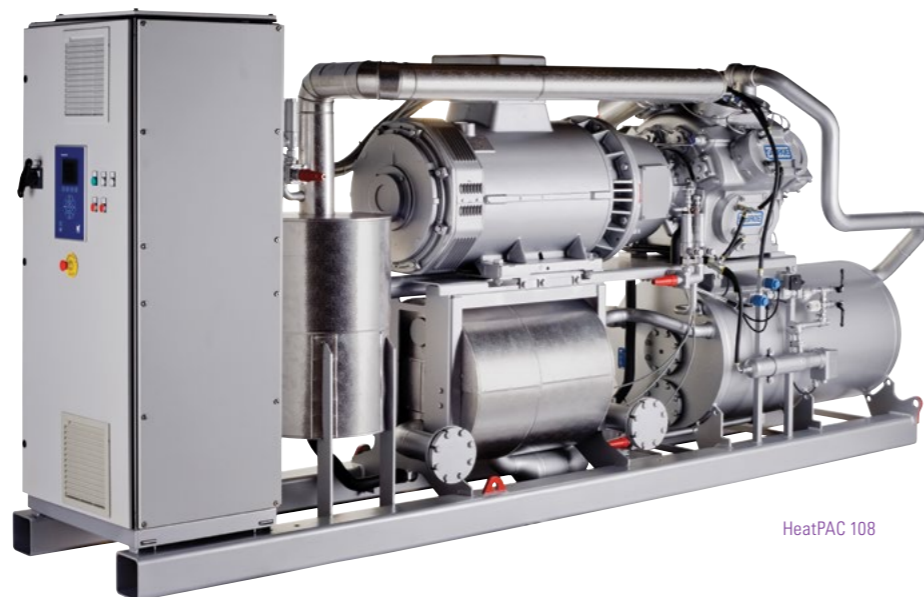

HeatPAC 108

Advantages

Factory-assembled, pre-tested packaged units based on Sabroe reciprocating compressors world-renowned for their reliability

Integrated configuration weighs less, and has less than half the footprint of bespoke heat pump designs

Indirect cooling and an uncomplicated flooded evaporating system, using natural ammonia (R717) only

Exceptional COP and outstanding part-load performance

Refrigerant charge 50% smaller than with conventional heat pumps, because of special condenser/evaporator design

Benefits

Easy pre-commissioning makes installation and running-in both faster and cheaper. Factory acceptance tests (FAT) available as an option

Low installation costs. Easy to mount even in confined spaces or unconventional locations

Greater safety and outstanding reliability

Low operating costs

Higher output per unit kW/kg refrigerant, lower unit cost and lower installation costs


Options

- Cascade evaporator
- Variable-speed drive (VSD)
- Soft-starter or Y/D starter
- De-superheater
- Subcooler
- Control panel mounted separately
- HeatPAC 24, 26 and 28: 60 Hz or VSD
- Factory acceptance tests (FAT).

Compliance

All HeatPAC heat pumps are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies.

Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

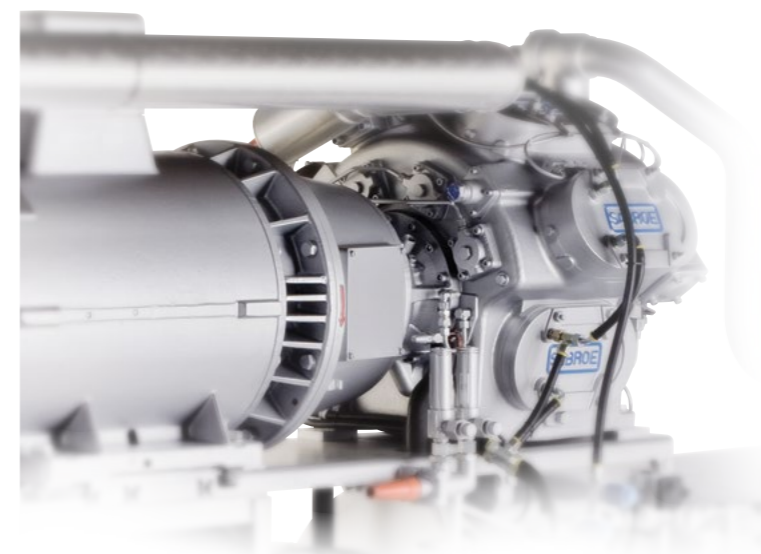

Optimised compressor alignment

Condenser water inlet +64°C, outlet +70°C
Evaporator water inlet +39°C, outlet +34°C

Type	Heating capacity kW	Cooling capacity kW	Power consumption kW	COP heat	R717 charge kg	Dry weight kg	Dimensions in mm			Sound level dB(A)
							L	W	H	
HeatPAC 24-W	240	202	38	6.3	20	2020	2800	1000	2000	75
HeatPAC 26-W	359	302	57	6.3	23	2230	2850	1000	2000	76
HeatPAC 28-W	484	408	77	6.3	25	2420	2900	1000	2000	77
HeatPAC 104-W	570	478	93	6.1	28	2630	3050	1000	2000	81
HeatPAC 106-W	852	715	138	6.2	37	3300	3750	1000	2000	82
HeatPAC 108-W	1149	965	186	6.2	48	3950	4050	1000	2000	83

W = Heat pump unit water/water.


Motor: 3 x 400 volt / 50 Hz, 1470 rpm.

COP ratio average = heating capacity / power consumption = 6.2.

Capacities are nominal at 1500 rpm.

Sound pressure levels in free field, over reflecting plane and one metre distance from the unit.

All information is subject to change without notice

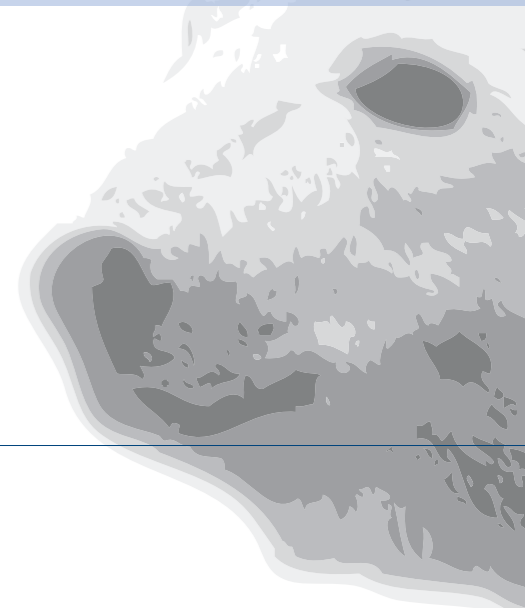

Sabroe HeatPAC heat pumps


Ammonia-based heat pumps using a screw compressor, with a capacity of up to 1800 kW

HeatPAC units are an extremely compact heat pump based on ultra-reliable Sabroe high-pressure screw compressors, using ammonia as refrigerant.

These highly customisable integrated units, featuring an uncomplicated flooded evaporating system, provide exceptional heat pump capacity from the smallest possible footprint, and with only a very small refrigerant charge. They are designed to provide a cost-effective way to tackle needs for cooling and heating at the same time, providing an extremely high coefficient of performance (COP).

Sabroe HeatPAC heat pumps are the ideal solution for effectively exploiting low-temperature waste heat, and turning it into hot water (up to 90°C), using only a minimum of electrical energy.

Sabroe HeatPAC heat pumps provide considerable scope for customisation to meet specific customer requirements.

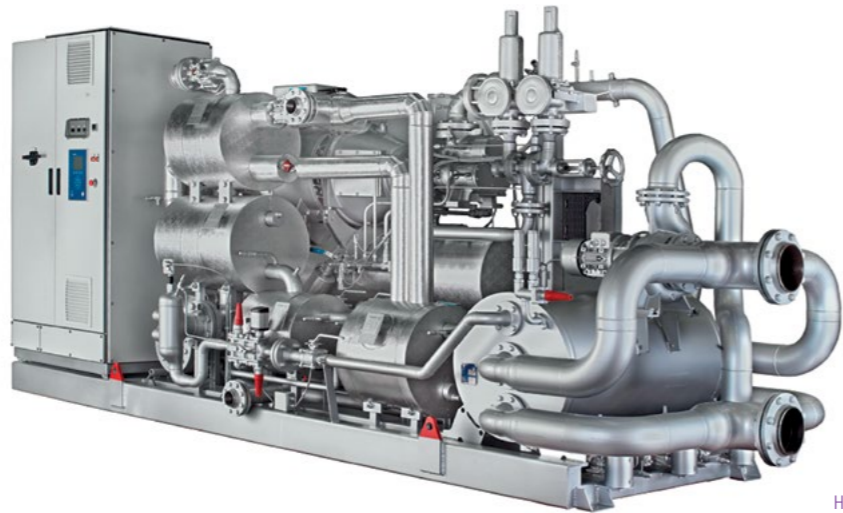

HeatPAC 157 HR

Advantages

Factory-assembled, pre-tested packaged units based on Sabroe screw compressors world-renowned for their reliability

Integrated configuration weighs less, and has less than half the footprint of bespoke heat pump designs

Indirect cooling and an uncomplicated flooded evaporating system, using natural ammonia (R717) only

Exceptional COP and outstanding part-load performance

Refrigerant charge 50% smaller than with conventional heat pumps, because of special condenser/evaporator design

Benefits

Easy pre-commissioning makes installation and running-in both faster and cheaper. Factory acceptance tests (FAT) available as an option

Low installation costs. Easy to mount even in confined spaces or unconventional locations

Greater safety and outstanding reliability

Low operating costs

Higher output per unit kW/kg refrigerant, lower unit cost and lower installation costs


Options

- Cascade evaporator
- Control panel mounted separately
- Factory acceptance tests (FAT).

Compliance

All HeatPAC heat pumps are fully compliant with appropriate major international design codes and the specifications laid down by the most common classification societies.

Approval in accordance with other technical requirements, specific national legislation or other classification societies' requirements is available on request.

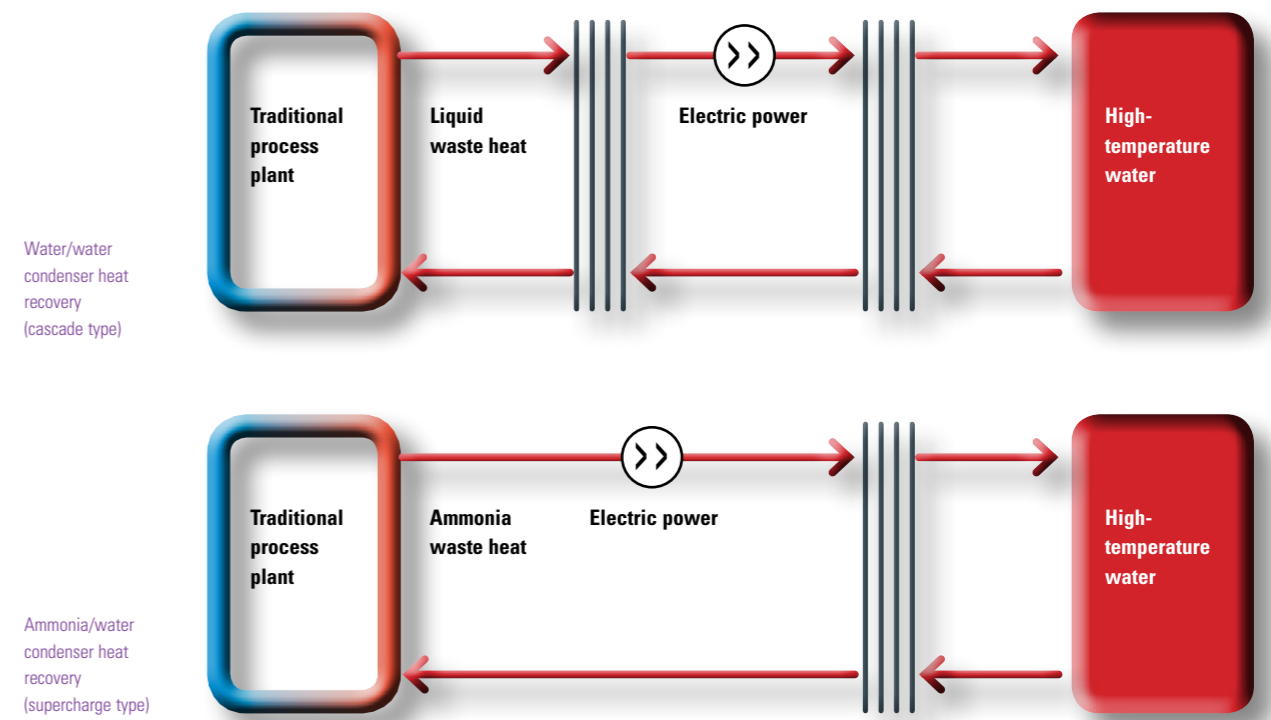

Heat pumps

The HeatPAC 157 HR is a versatile heat pump that can cope with a wide range of operating conditions. These units are particularly efficient under part-load conditions due to the variable speed drive (1000–6000 rpm) fitted as standard.

Each unit is specially configured to comply with the specific set of operating conditions, in order to ensure the most effective exploitation of the waste heat available.

HeatPAC 157 HR											
	Cold side				Hot side						
	Temperature in °C	Temperature out °C	Flow m³/h	Cooling capacity kW	Temperature in °C	Temperature out °C	Flow m³/h	Heating capacity kW	Power motor kW	COP	
Water	40	35.9	300	1422	Water	40	85	34.8	1792	407	4.4
Water	30	26.8	300	1107	Water	40	85	28.2	1453	381	3.8
Water	20	17.6	300	818	Water	40	85	22.0	1121	335	3.3
Water	10	8.3	300	588	Water	40	85	16.5	852	290	2.9

Capacities are nominal at 6000 rpm. Specific capacity must be calculated for actual running conditions. Heating capacity 1600 kW at 40°C heat source and 85°C water out.

All information is subject to change without notice

Sabroe End-of-Line Test Centre

Full satisfaction – no surprises

Not only are Sabroe systems at the forefront of industrial refrigeration technology, they're also backed by state-of-the-art facilities for pre-delivery, pre-commissioning testing.

We rigorously test the performance of every unit before it leaves the factory, so you can be 100% sure it lives up to your expectations in full when it arrives. You're entitled to expect full transparency – and we make sure Sabroe systems deliver.



Testing in the factory – not on site

The unique Sabroe End-of-Line (EOL) Test Centre, located in Denmark, is a purpose-built facility comprehensively spec'ed with state-of-the-art monitoring and testing equipment.

We can conduct a comprehensive range of tests, ranging from full-blown Factory Acceptance Tests (FAT) to any specific test package you may prefer. You and your staff are, of course, welcome to witness every stage of tests and trial runs to make sure everything performs as intended, with no unwelcome surprises.

Documented capabilities

Rigorous pre-commissioning testing gives you comprehensive, reliable documentation of the performance and capabilities of the exact equipment you'll be receiving – not just generic approximations.




Johnson Controls Denmark	
Phone +45 87 36 70 00	
-- TEST REPORT FOR CHILLER UNIT:	
Test date:	30 maj 2013
Customer:	
Order No.:	
Serial No.:	259615-1_302013
MRB No.:	511524
UNIT:	
Compressor:	SAB 233S
Condenser:	MK15 BWFR
Evaporator:	MK15 BWFR
MOTOR:	
Motor Power:	400 kW
Efficiency:	0,930
Voltage:	400 V
Refrigerant:	
Oil:	

Solid, dependable documentation helps you and your technical staff plan effective implementation and integration with other equipment. And all the pre-delivery tests help save you time, money and hassle with commissioning and running in. With Sabroe product deliveries, you get what you ordered – and it works as you expected.



Test stands in the End-of-Line Test Centre

The Sabroe brand has been in this business ever since 1897 – and development continues

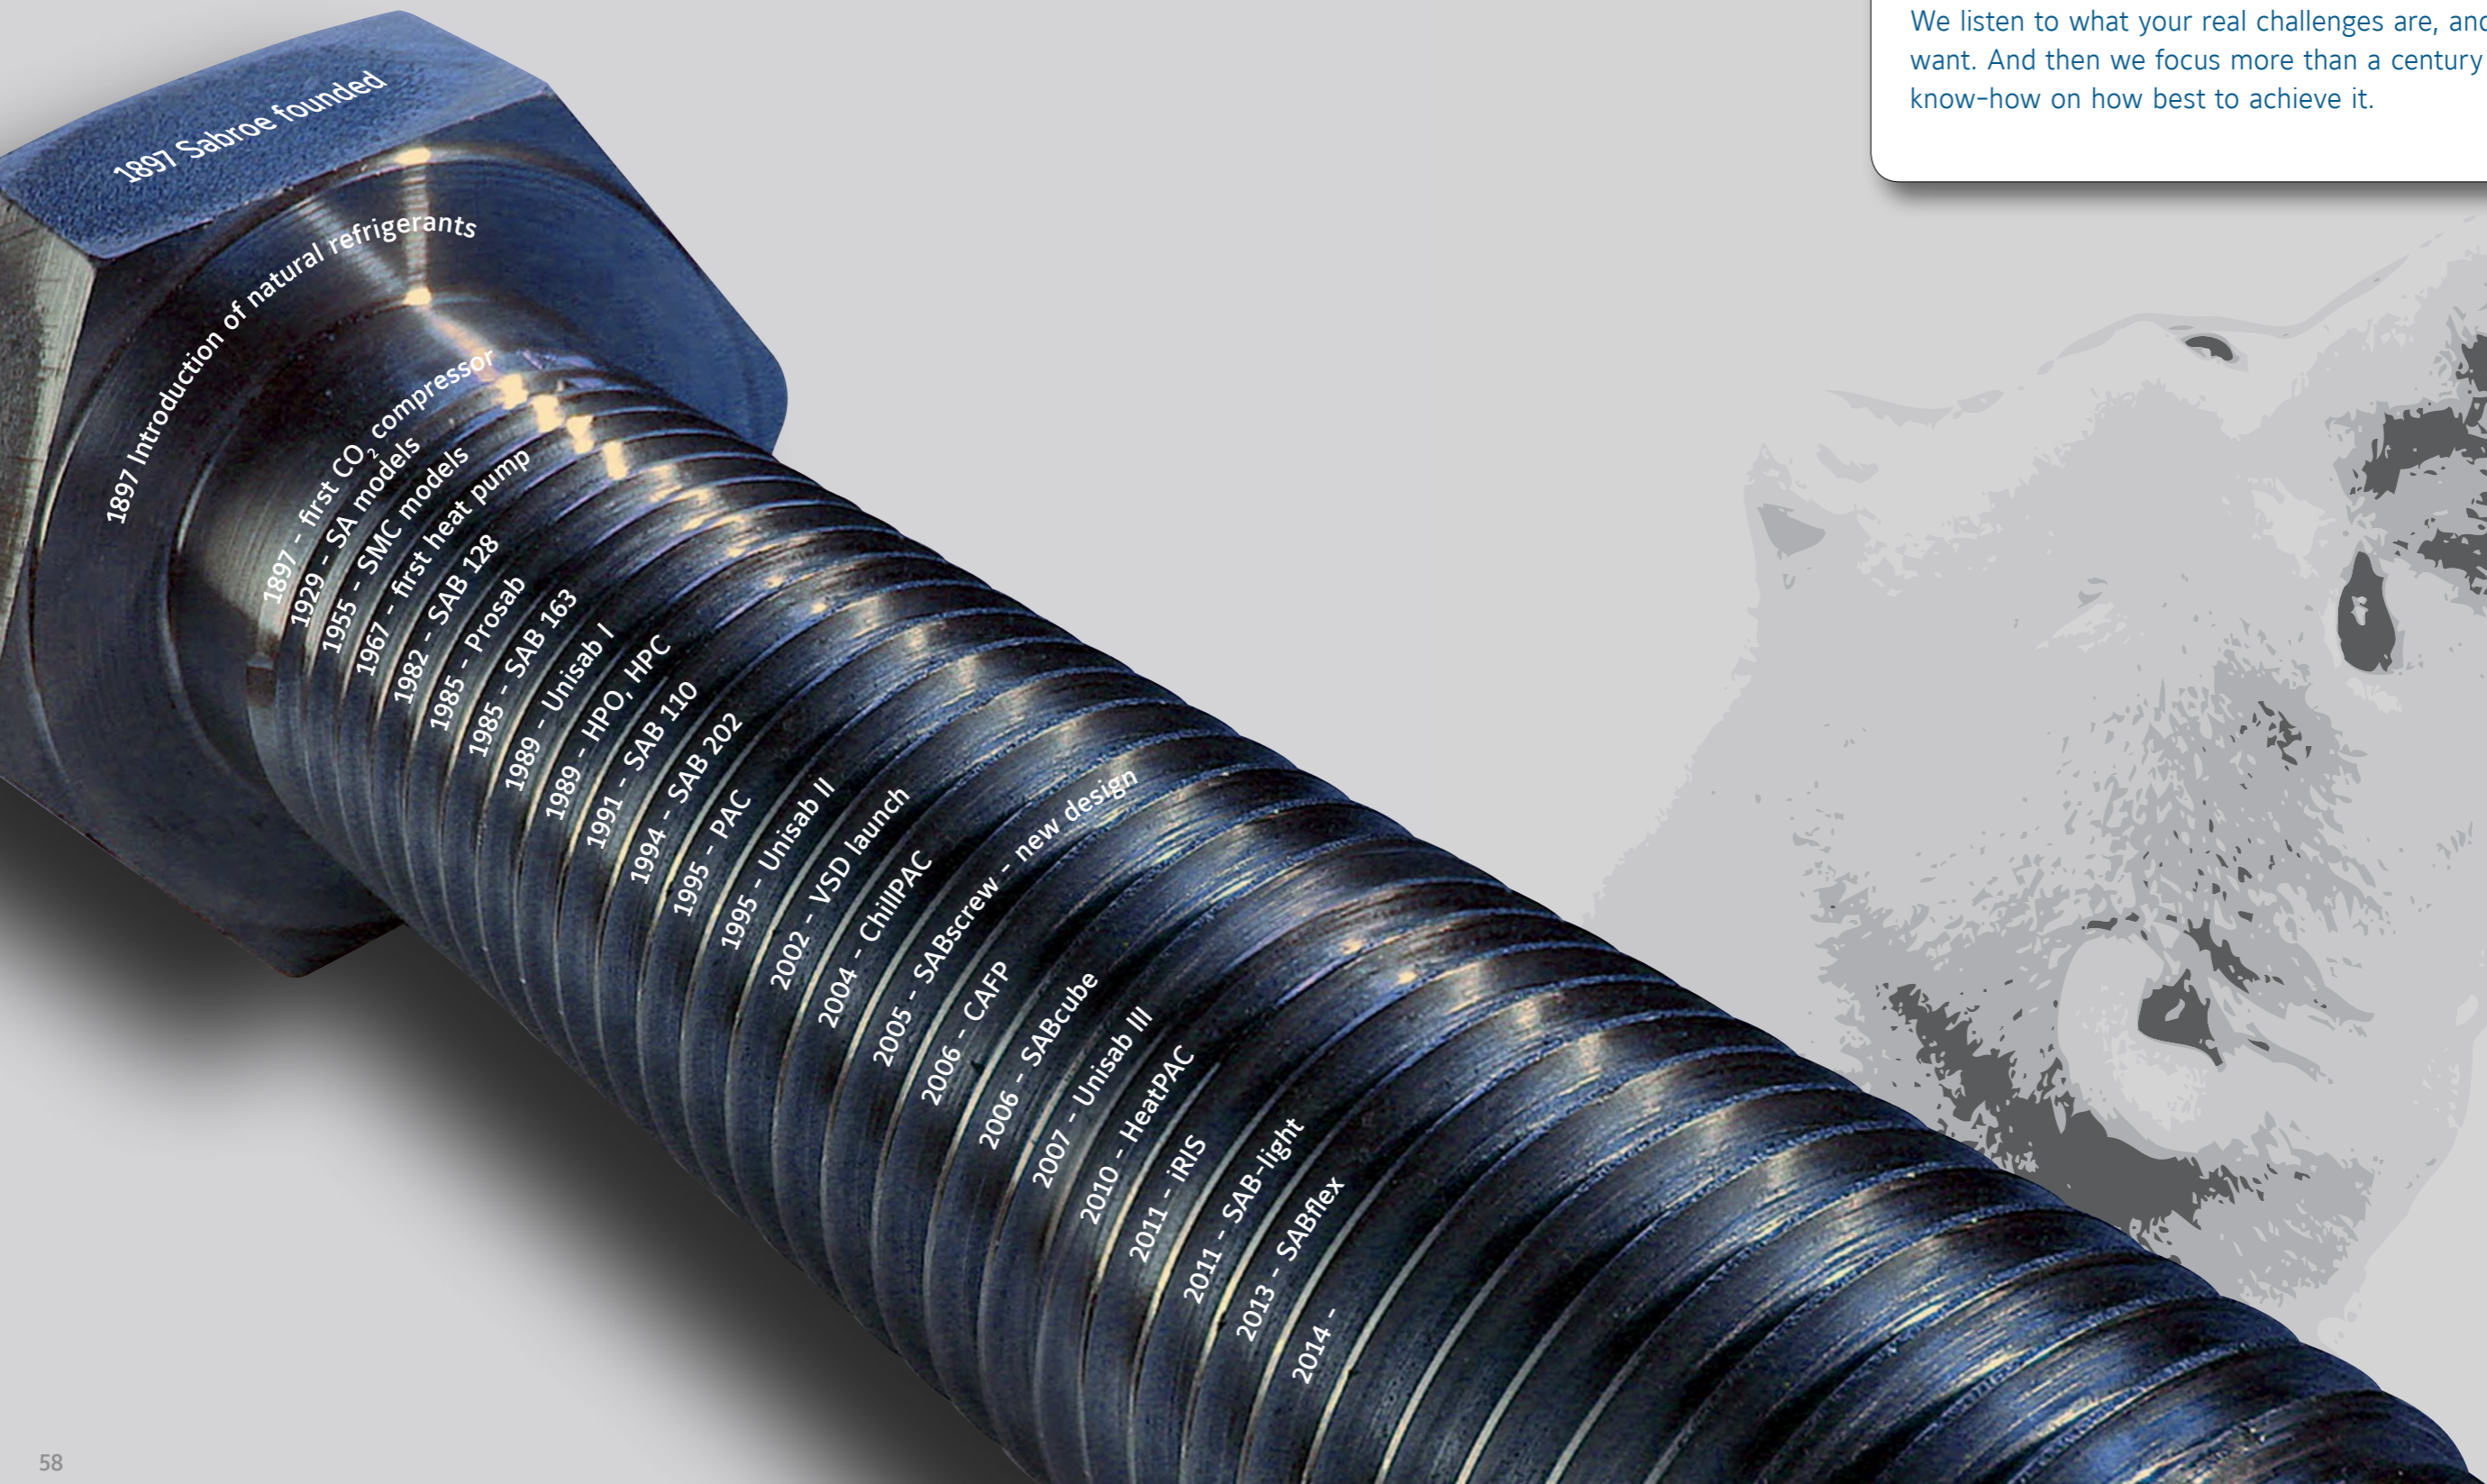

We have proved we can repeatedly and consistently deliver on our customers' needs – no matter how big and complex, or how small and sensitive.

We listen to what your real challenges are, and what you really want. And then we focus more than a century of specialist know-how on how best to achieve it.



Your local representative



Johnson Controls Denmark ApS
Sabroe Factory
Christian X's Vej 201 · 8270 Højbjerg
Denmark
Phone +45 87 36 70 00
Fax +45 87 36 70 05
www.sabroe.com

